



Manufacturers and Industrial Agents

PRODUCT CATALOGUE

BRAMLEY

IREGA

Asada

GARRICK

Linishall

TOHO

SpillFix

GarrickHerbert.com.au



OUR HISTORY

Garrick Herbert Pty Ltd was established in March 1981 as the newest member of the Herbert Engineering Group. Its sister company, R.R. Bramley & Co. Ltd was founded in Auckland, New Zealand in 1921 by Richard Bramley as an Engineering workshop. Accordingly, they celebrated the 100 year centenary of operation during 2021.

Philip Herbert purchased the company in 1954 and commenced production of the 'BRAMLEY' range of small engineering machine tools. Exports of these products to Australia grew to the stage that his youngest son, Myles Herbert, moved to Sydney to establish Garrick Herbert P/L as a local base for distribution of the range throughout Australia.

To complement the Bramley range, international brands for allied quality products were introduced. Early additions were the Asada Threading Machines and Irega Adjustable Wrenches - both now market leaders in Australia.

In 1987 manufacturing at the Sydney operation began with the introduction of 'Bramley - Aust Made' sheetmetal Curving Rolls. Following the success of that product range LINISHALL, the brand leader in Belt Grinding, was purchased in 1991 and integrated into the Sydney facility.

The company now represents a diverse collection of reputable manufacturers from Australia, New Zealand, Japan, USA, Spain, Thailand, China and other countries and distributes their products through Industrial Supply and Machinery Merchants throughout Australia. Only the highest quality products suitable for industrial trade users are selected.

Products include: hand and machine tools, machinery, lifting and materials handling equipment, cutting oils and absorbents, etc.

Every effort has been made to publish the correct details in this catalogue. No responsibility will be taken for errors, omissions or changes in product specifications. As we are constantly striving to improve our products, design & specification may be updated from those shown in this catalogue. Latest models can be found on our website: garrickherbert.com.au

STEEL BENDING AND FORMING

BRAMLEY Bar Benders	7
BRAMLEY Rod Bender	7
BRAMLEY Manual Thin Wall Tube Bender	7
BRAMLEY Pool Fence Tube Bender	7
BRAMLEY Wrought Iron Scroll Bender Attachment	8
BRAMLEY Picket & Basket Twister Attachment	8
BRAMLEY Fully Optioned Wrought Iron Bender	8
BRAMLEY Hydraulic Thin Wall Tube Bender	9
BRAMLEY Electric Hydraulic Thin Wall Tube Bender	9
BRAMLEY Hydraulic Pipe Bender	9
BRAMLEY Electric-Hydraulic Pipe Bender	9
BRAMLEY Replacement Pipe Bender Formers	10
BRAMLEY Pro Bender	10
BRAMLEY Pro Bender attachments	10
BRAMLEY Pipe Bending Attachments	10
BRAMLEY Tube Bending Attachments	10
BRAMLEY Box & Pan Sheetmetal Folder	11
BRAMLEY Sheetmetal Curving Rolls	11
BRAMLEY Hand Lever Shears	11
BRAMLEY Sheetmetal Swage, Jenny & Wiring Machines	12
BRAMLEY Sheetmetal Hole Punches	12

STEEL CUTTING

GARRICK Bandsaw	13
GARRICK Replacement Bandsaw Blades	15
GARRICK Heavy-duty Industrial Roller Stands	15
GARRICK Heavy-duty Conveyor Roller Tables	15
ASADA Reciprocating Pipe Saw	16
ASADA Spare Blades to Suit Reciprocating Pipe Saw	16
GARRICK Industrial Drill Presses	17
GARRICK Workshop Drill Presses	18
GARRICK Drill Vice	18
GARRICK Drill Sharpener	18

GRINDING

LINISHALL Bench Grinders	19
LINISHALL Workshop Bench Grinder	20
LINISHALL Heavy-duty Bench Grinders	20
LINISHALL Combination Wheel & Belt Grinders	21
LINISHALL Belt & Disc Grinding Attachment	21

LINISHALL Mitre Table	21
LINISHALL Bench Grinder Stand	21
LINISHALL Polisher	21
LINISHALL Buff or Polishing Guard	21
LINISHALL Belt Grinding Attachments	22
LINISHALL Bench-mounted Belt Grinding Machines	22
LINISHALL Pedestal-mounted Belt Grinding Machines	22
LINISHALL Heavy-duty Linishers	22
LINISHALL Rubber Contact Wheels	23
LINISHALL Polishing Belt	23
LINISHALL Abrasive (Linishing) Belts	24
LINISHALL Sanding Discs Self Adhesive	24
LINISHALL Grinding Wheels	25
LINISHALL Wire Wheel	25
LINISHALL Tapered Spindles	25
LINISHALL Buffing Mops	25
LINISHALL Buffing Compounds	25
LINISHALL Grinding Wheel Dresser	25

THREADING & ROLL GROOVING

ASADA Pipe & Bolt Threading Machines	26
ASADA Beaver 50 Trolley Cart	26
ASADA Rod/Bolt Threading Machine	27
ASADA Neat Threading Oil	27
ASADA Spare Dies	27
ASADA Spare Dies Heads	27
ASADA Dies & Dieheads Compatibility	28
ASADA Nipple Chuck Set	30
GARRICK Portable Power Pipe Threaders	30
GARRICK Hand Ratchet Pipe Threaders	30
ASADA Reciprocating Pipe Saw	31
GARRICK Footswitch	31
GARRICK Manual Pressure Test Pump	31
ASADA Electric Pressure Test Pump	31
GARRICK Roll Groover	32
GARRICK Roll Groover Adapter & Drivebar	32
GARRICK Hydraulic Roll Groovers	32
GARRICK Power Drive	32
ASADA Roll Groover	33
GARRICK Roll Grooving Attachment	33
GARRICK Pipe Stand	33
GARRICK Chain Vices	33
GARRICK Portable Work Stand	33

LIFTING

GARRICK Mini Chain Block	34
GARRICK Mini Lever Hoists	34
GARRICK Chain Blocks	34
GARRICK Lever Hoists - Load Limited	34
TOHO Chain Blocks	35
GARRICK Chain Slings	35
GARRICK Grade S Bow Shackles	36
GARRICK Grade S Dee Shackles	36
GARRICK Vehicle Safety Chain Hook	36
TOHO Girder Trolley Stainless Steel	37
GARRICK Girder Trolleys	37
GARRICK Girder Clamps	37
GARRICK Universal Plate Clamps	37
GARRICK Permanent Magnet Lifter	37
GARRICK Vertical Drum Clamp	38
GARRICK Chain & Clamp Drum Lifter	38
GARRICK Ute Crane 12 Volt-500/800kg	38
TOHO Pro Mini Electric Hoist	39
TOHO Digital Crane Scale	39
TOHO Electric Chain Hoist /Single Phase	39
TOHO Electric Chain Hoist with Trolley	40
TOHO Electric Chain Hoist	41
TOHO Compact Wire Rope Builders Hoist	42
TOHO Brushless Builders Hoist	43
TOHO Builder's Hoist Mounting Arm Bracket	43
GARRICK Round Webbing Slings	44
GARRICK Flat Webbing Slings	45
GARRICK Heavy-duty Ratchet Tie Downs	45
GARRICK NEW Reversible Ratchet Tie Down	46
GARRICK Quick Load Ratchet Tie Downs	46
GARRICK Retractable Tie Down	47

COOLING

GARRICK Portable Evaporative 120L Air Cooler	47
--	----

CARGO NETS

GARRICK Heavy Duty Cargo Nets	48
-------------------------------	----

MATERIALS HANDALING

GARRICK Load Skates	49
TOHO Pallet Truck	50

HAND TOOLS

IREGA Chrome Adjustable Wrenches	51
IREGA Insulated Adjustable Wrenches	53
IREGA Xtra Slim Jaw Adjustable Wrenches	53
IREGA Reversible Jaw Wrenches	53
GARRICK Aluminium Pipe Wrenches	54
GARRICK Chain & Strap Wrenches	54
GARRICK Steel Pipe Cutters	54
GARRICK Heavy-duty Steel Pipe Cutter	54
GARRICK Tube Cutters	54
GARRICK Telescopic Tube Cutters	55
GARRICK Tube Bender	55
GARRICK Tube Bending Spring Set	55
GARRICK Basin Wrench	55
GARRICK Flaring Tools	55
GARRICK Expander Kit	55
GARRICK Plastic Pipe Shears	56
GARRICK Plastic Hose/Conduit Cutters	56
GARRICK Internal/External Deburrer	56
GARRICK Manual Pressure Test Pump	56
ASADA Electric Pressure Test Pump	57
GARRICK Brazing & Soldering Torch Pump	57
GARRICK Air/Acetylene Torch Kit	57

SPILL MANAGEMENT

GARRICK Natural Zeolite Absorbent	58
SPILLFIX Universal Organic Absorbent	58
GARRICK Absorbents	58
GARRICK Spill Kits	59
SPILLFIX Spill Kit Refills	59
GARRICK Compact Spill Kit for utes	60
GARRICK Transport or Workshop Universal Spill Kit	60
GARRICK Bio-Waste Absorbent	60
GARRICK Cleaning Cloths	61

OILS

GARRICK Soluble Cutting Oil	62
ASADA Neat Threading Oil	62



BRAMLEY Bar Benders

Model: AB1
Features 4-position quick cam action clamping


Model: AB2
Uses full vice clamping with double spring return



- Solid cast iron construction with swivel casting made from spheroidal graphite iron for extra strength
- Infinitely adjustable angle stop to achieve bends from 0° to just over 90°
- Swivel bending plate adjusts against steel being bent for sharp bending radius
- Optional stand

Mild Steel	AB1	AB2
FLAT BAR	80 x 6mm or 60 x 8mm or 30 x 12mm	100mm x 8mm or 60 x 10mm or 50 x 12mm
SQUARE	20 x 20mm	25 x 25mm
ROUND	Ø 20mm	Ø 25mm

Capacities are rated on volume of steel to be bent.
(i.e. as height is increased, width must be correspondingly decreased)

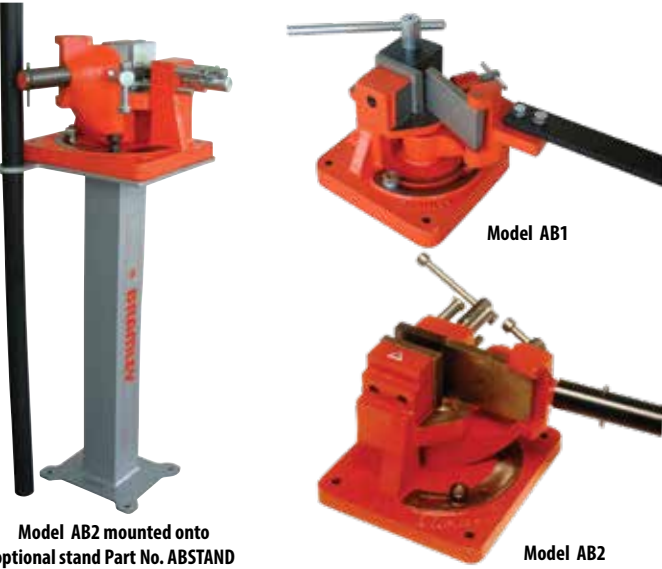

BRAMLEY Rod Bender

Model: 60/16
Up to 16mm M.S. rod capacity

- Simple and easy to use rod bender
- When bending deformed section reinforcing bar, the effective diameter of the rod has been increased due to the deformation pieces: capacity is therefore reduced
- Now has 50, 60 & 80mm rollers
- Bending Radius 180°



BRAMLEY Manual Thin Wall Tube Bender

For bending thin wall tube up to 90° in one operation.

Model: TBRD - Round (1.6mm wall thickness)
Supplied with a set of 5 formers & follow roller to suit round tube (1/2" – 1" dia)

Model: TBSQ - Square
Supplied with a set of 5 formers & follow roller to suit square tube (1/2" – 1")

- Now with lightweight aluminium alloy formers
- Square formers can fit onto the round tube bender (& vice-versa)
- The 1.1/8" round former is an optional extra
- Optional stand - incorporates storage pegs for formers
- Optional Follow Rollers available, to allow for square tube

Round Formers			Square Formers		
Model	Tube Size	Radius of Bend	Model	Tube Size	Radius of Bend
TBFR1/2	½"	12.7mm	TBFS1/2	½"	12.7mm
TBFR5/8	5/8"	15.8mm	TBFS5/8	5/8"	15.8mm
TBFR3/4	¾"	19.0mm	TBFS3/4	¾"	19.0mm
TBFR7/8	7/8"	22.2mm	TBFS7/8	7/8"	22.2mm
TBFR1	1"	25.4mm	TBFS1	1"	25.4mm
TBFR1-1/8	1.1/8"	28.6mm			



Model TBRD shown in use and mounted on optional stand (Model: TBSTAND) which incorporates storage pegs for formers.



BRAMLEY Pool Fence Tube Bender

Model: TBPF
For bending tube into a tight radius (up to 180°) – such as for pool fencing to meet Australian Standards.

- The standard unit is supplied with one former and follow roller suitable for 5/8" dia. round tube to give 100mm centres bending diameter



Model	Description	Bending Dia. Centres
TBFR1/2	Tube Bender Former - Round ½"	100mm
TBFR5/8PF	Tube Bender Former - Round 5/8" PF	100mm
TBFR5/8	Tube Bender Former - Round 5/8"	110mm
TBFR3/4PF	Tube Bender Former - Round ¾" PF	110mm
TBFR5/8PF	Follow Roller - Round 5/8" PF	
TBFR3/4PF	Follow Roller - Round ¾" PF	

BRAMLEY Wrought Iron Scroll Bender Attachment

Model: B-WI
Fits onto the TBRD Tube Bender (separate supply) or can be mounted to your own workshop vice

For bending scrolls, eyes, spiral shapes and other complex shapes from round, square and flat bar in one operation.

- Tooling Plate has 48 holes drilled and tapped allowing tooling to be fitted anywhere on tooling plate
- Can bend Mild Steel up to 12mm (1/2") Round or Square (Minimum radius 10mm for 12mm material, 7mm for 10mm material)
- Can bend 25 x 6mm (1" x 1/4") Flat Mild Steel with a 7mm min. radius
- Will bend in any direction with unlimited number of rotations (depending only on material used)
- Standard range of scroll shape dies supplied with unit



WROUGHT IRON BENDER ATTACHMENT COMPONENTS



Round bar Flat bar Eye in end of bar

BRAMLEY Picket & Basket Twister Attachment

Model: B-PBT
Fits onto the TBSTAND Tube Bender Stand (separate supply) or can be mounted onto the leg of any suitable bench.

For bending pickets and baskets from square and flat bar in one operation.

- PRODUCES:**
- Cages from 6mm square mild steel bar
 - Twists from 6mm x 25mm flat mild steel bar or 1 2.5mm square



BRAMLEY Fully Optioned Wrought Iron Bender

Model: B-WIC

- INCLUDES:**
- TBRD - Tube Bender
 - TBSTAND - Tube Bender Stand
 - B-WI - Wrought Iron Bender Attachment
 - B-PBT - Picket & Basket Attachment



Model	Description
B-WI-TBA	Wrought Iron Bender attachment (Fits to suit existing Bramley Tube Bender)
B-WI	Wrought Iron Bender complete (Including Handle, Follow Roller etc - Held in a vice or bolted to a bench)
B-PBT	Picket & Basket Twister attachment (Bolts onto Bramley Tube Bender Stand or the side of a substantial bench)
B-WIC	Fully Optioned Wrought Iron Bender (Includes Round Tube Bender ½" - 1", Tube Bender Stand, Wrought Iron Bender Attachment, Picket & Basket Twister Attachment)



BRAMLEY Hydraulic Thin Wall Tube Bender

Model: TBHYD
Supplied standard with 1", 1.1/2" & 2" tube formers 1" - 2" O.D. capacity and up to 2mm wall thickness in mild steel

- 180° maximum bend, so perfect for producing U-bends
- 12T manual hydraulic ram for ease of bending
- Precision machined Tube Slippers & Formers for bend quality
- Shipping weight: 62 kg

Model	Tube Size	Centreline Radius of Bend
TBHF1	1" (25.4mm)	115mm
TBHF1-1/8	1.1/8" (28.6mm)	115mm
TBHF1-1/4	1.1/4" (31.8mm)	115mm
TBHF1-3/8	1.3/8" (35mm)	140mm
TBHF1-1/2	1.1/2" (38mm)	140mm
TBHF1-5/8	1.5/8" (41.3mm)	140mm
TBHF1-3/4	1.3/4" (44.5mm)	165mm
TBHF1-7/8	1.7/8" (47.6mm)	165mm
TBHF2	2" (51mm)	165mm


Extra Former & Slipper Sets sold separately.



BRAMLEY Electric Hydraulic Thin Wall Tube Bender

Model: TBHYD-E
Same specifications as Model TBHYD manual version (above), but fitted instead with the compact BRAMLEY Electric/Hydraulic Ram fitted for ease of use & speed of operation


- Shipping weight: 73kg

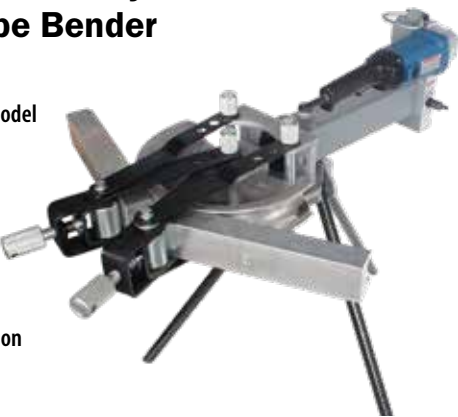

BRAMLEY Hydraulic Pipe Bender

Model: PB2
Supplied with six formers, two bobbins (support rollers) and pins 1/2" - 2" N.B. Pipe capacity

- Lightweight aluminium alloy formers with large angle of arc to support pipe during bending. This results in a bend of superior quality.
- Cross section of formers is of "elliptical" form to minimise flattening of bend
- Solid frame fabrication eliminates flexing
- Maximum (or up to) 90° bend for both PB2 & PB2-E
- During bending operation
- 16 ton capacity hydraulic cylinder
- Shipping Weight: 64 kg

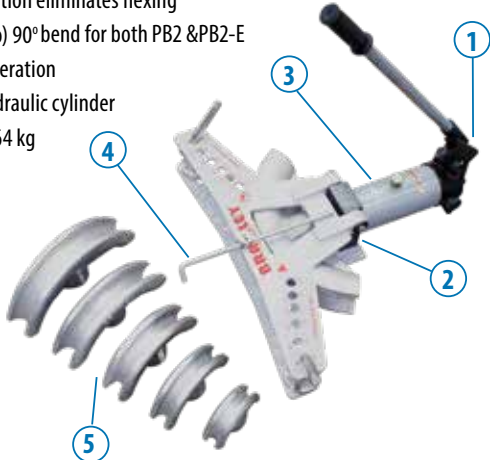

New Features

1. Two-stage pump action. Allows quick pumping out of former to point where load is applied, and then less effort needed during bending
2. Flip top frame for easy pipe placement & removal and changing of former size
3. Spring return ram
4. Bending angle measuring stop
5. Gravity Die cast aluminium alloy formers same specifications but higher quality finish

BRAMLEY Electric-Hydraulic Pipe Bender

Model: PB2-E

- Supplied standard with 1/2" to 2" pipe formers.
- Lightweight aluminium alloy formers with large angle of arc to support pipe during bending. This results in a bend of superior quality
- Cross section of formers is of "elliptical" form to minimise flattening of bend
- Solid frame fabrication eliminates flexing during bending operation
- Comes with BRAMLEY Electric/Hydraulic Ram fitted for ease of use & speed of operation.
- 15 ton capacity hydraulic cylinder
- Shipping Weight 65kg



BRAMLEY Replacement Pipe Bender Formers

- Lightweight, aluminium alloy formers of "elliptical" design and large angle of arc to achieve superior quality bends
- To replace lost or damaged formers for BRAMLEY and other brands of Pipe Bender
- When using BRAMLEY formers on another brand of pipe bender, ensure distance between rollers is not too close which can cause former damage
- The ram spigot hole on BRAMLEY formers is 38mm, This can be bushed to suit smaller ram diameters



Model	Former	Radius of Bend
PBF1/2	1/2"	75mm
PBF3/4	3/4"	105mm
PBF1	1"	140mm
PBF1-1/4	1.1/4"	175mm
PBF1-1/2	1.1/2"	200mm
PBF2	2"	240mm

PBRP, Pipe Bender Roller Pin



PBR, Pipe Bender Roller



BRAMLEY Pro Bender 35T

Model: PROBENDER

- 35T Hydraulic Bending Machine
- 35 ton force / 415v, 3Ph
- The standard machine is a robust powered hydraulic bender of 35 tonne rated capacity supplied with attachment for bending flat bar up to 100 x 12 mm or round & square bar up to 25mm
- Optional accessories are available: For bending larger flat bar sizes, pipe bending, reinforcing rod & straightening bars etc



OPTIONAL ATTACHMENTS
BRAMLEY Pro Bender 35T

Model: PROBENDER-LGV-ATTACH
Large V bending Attachment

- Enables bending of larger sections of flat bar such as 75 x 16mm or 50 x 20mm



BRAMLEY Pipe Bending Attachment

Model: PROBENDER-PB-ATTACH

Comprises of a Pipe Bending frame & the BRAMLEY aluminium alloy elliptical formers for bending pipe from 1/2" - 2" N.B.



BRAMLEY Straightening & Rebar bending Attachment

Model: PROBENDER-RS-ATTACH

- For bending round & reinforcing bar up to 32mm dia.
- Can also be used for straightening up to 40mm dia. round bar or 50 x 25mm flat bar etc up to 32mm dia.



BRAMLEY Tube Bending Attachment

Model: PROBENDER-TBRD-ATTACH (1/2"-1" Round)
Model: PROBENDER-TBSQ-ATTACH (1/2"-1" Square)

Bender Frame and Formers for tube bending from 1/2" - 1" nominal size across flats. (1/8" optional Round)



BRAMLEY Pipe & Tube Notching Attachment

Model: PROBENDER-NOTCH

- For easy notching of pipes for lateral weld connections.
- Different sizes dies available for Tube. 1", 1-1/2", & 2"
- Different sizes dies available for Pipe. 1-1/4", 1-1/2", & 2"
- Notcher Dies & Punches available 1" & 2"





BRAMLEY Box & Pan Sheetmetal Folder

Model: 2F - 610 x 1.2 mm capacity

- Bench mounting
- Heavy duty all steel construction
- Made to the same quality and precision specifications as larger machines, but with compact size and economy
- Interchangeable finger segments for a wide variety of box & pan sizes
- Cam adjustment on top beam provides simple and positive setting for different material thickness
- Simple robust clamping action



BRAMLEY Sheetmetal Curving Rolls

Models: 2.5 X 50

- Solid steel & investment cast construction
- Wide sheetmetal base for stability
- Top roller lifts out for small diameter rolling
- Quick roller adjustment

Model	Rolls	Capacity
2.5 X 50	63mm x 1270mm	1.6mm



BRAMLEY Bench Curving Rolls

Model: 18ROLLS - 25mm x 450mm Rolls - 0.8 mm capacity

- Heavy duty all steel construction
- Top roll lifts for easy removal of tubular work
- Incorporates grooves for wiring work



BRAMLEY Hand Lever Shears

Model: HS5

- Blades manufactured from high quality, wear resistant, precision ground tool steel
- Lever toggle action gives high mechanical advantage for easy cutting
- Body manufactured from thick section mild steel plate
- Handle balance spring assists ease of operation
- Simple lower blade adjustment for correct shearing tolerances
- Suitable for cutting sheetmetal



Suitable for cutting sheetmetal

Capacity	Model HS5
Plate	5mm
Flat	70 x 6mm
Round	13mm
Blade Length	200mm
Cutting Length (Max)	175mm

BRAMLEY Sheetmetal Swage, Jenny & Wiring Machines

Model: SJ2 - manual - 16 swg (1.6 mm) capacity

Model: SJ2-M - powered - 16 swg (1.6 mm) capacity



- Supplied with heavy-duty 750W (1HP), 3Ph motor and reduction gearbox to drive the rollers at 38rpm, controlled via interlocked forward / reverse foot-switches.
- High quality, robust, industrial duty machines, manufactured from steel, which provides good strength whilst also providing a very good bearing surface for the rotating shafts and slider blocks

NEW Model with larger throat capacity

Capacity	SJ2 / SJ2-M
SHEET	16 g (1.6mm)
THROAT DEPTH (with guide)	275mm
(without guide)	380mm



Standard wheels - SJ2 & SJ2-M

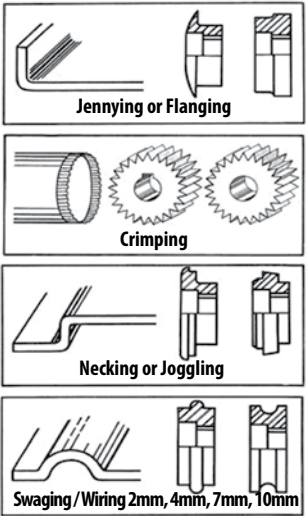

Included with each machine:

- 2mm Wiring Top and Bottom
- 4mm Wiring Top and Bottom
- 7mm Wiring Top and Bottom
- 10mm Wiring Top and Bottom
- 1x Jenny Roller Bottom
- 1x Closing Roller Bottom
- 2x Crimping
- 2x Necking
- 2x Bearing Blocks
- 1x Flat Roller Top

Shown with optional stand

BRAMLEY Sheetmetal Hole Punches

1/2" - 2" Individual sizes available (see table below)

Model: CPSET - Set of 6 popular sizes (16, 20, 22, 25.5, 32 & 35 mm)

- 3 point design on punch for easier cutting
- Upgraded tool-steel specification for increased life & performance
- Cut Stainless Steel more easily than previous design
- For simple cutting of neat holes in sheet-metal



Simple to use:

1. Drill a hole approximately 1mm larger than drive screw
2. Insert screw through die
3. Place screw through hole in metal & screw on punch
4. Turn drive screw with spanner or wrench until metal is cut



CPSET - Set of 6

Also cuts stainless steel

Model	Size	Capacity (Mild Steel)	Capacity (Stainless Steel)	Bolt Thread
CP12.5	1/2" (12.5mm)	2mm	1.6mm	M8
CP16	5/8" (16mm)	2mm	1.6mm	M8
CP19	3/4" (19mm)	2mm	1.6mm	M10
CP20	20mm	2mm	1.6mm	M10
CP22	7/8" (22mm)	2mm	1.6mm	M10
CP25.5	1" (25.5mm)	2mm	1.6mm	M12
CP28.5	1-1/8" (28.5mm)	2.5mm	2mm	M12
CP30	1-3/16" (30mm)	2.5mm	2mm	M12
CP32	1-1/4" (32mm)	2.5mm	2mm	M12
CP35	1-3/8" (35mm)	2.5mm	2mm	M12
CP38	1-1/2" (38mm)	2.5mm	2mm	M12
CP41.5	1-5/8" (41.5mm)	2.5mm	2mm	M20
CP44.5	1-3/4" (44.5mm)	2.5mm	2mm	M20
CP48	1-7/8" (48mm)	2.5mm	2mm	M20
CP51	2" (51mm)	2.5mm	2mm	M20

GARRICK Bandsaw

Model: BS8SW - 8" Bandsaw

- Automatic down feed stop
- Quick release vice and swivel cutting head from -45° to +45° (BS8SW)
- All ball-bearing blade guides
- All cast-iron frame and bed
- Hydraulic down feed control with infinitely variable adjustment
- Wheels allow easy movement around the workshop
- 3-speed belt drive allows machine to handle a wide range of materials



Model: BS8SW
(Swivel Bow)

GARRICK Bandsaw

Model: BS260 - 9" Bandsaw

- Can replace the function of traditional cold-cut saws, but with greater capacity
- Adjustable hydraulic cylinder for automatic feed option
- Swivel head can mitre cut to 60°
- Includes blade cleaning wire wheel
- Ball bearing blade guides
- 27mm wide blade minimises run-out for more accurate cutting
- Supplied on Machine Stand with integrated coolant system



Model: BS260
(Swivel Bow)

GARRICK Bandsaw

Model: BS9 9" Table Top Bandsaw

Garrick Vertical 9 inch Table Top bandsaw is perfect for the home workshop or smaller jobs in industrial applications. Perfect for cutting wood and metal (blades can be swapped easily) Model is supplied with a wood cutting blade.

- FEATURES:
- Compact table top design ideal for home workshops and smaller industrial jobs
 - Cuts both wood and metal with easily swappable blades
 - Supplied with a wood-cutting blade for immediate use
 - Side emergency switch for quick and safe power shut-off
 - Micro switch provides added operational safety
 - 90mm cutting depth accommodates various material thicknesses
 - 230mm cutting width handles wider workpieces
 - 305 x 305mm table size offers a stable and spacious work surface
 - Table tilts from 0 to 45 degrees for accurate angled cuts
 - 1575mm blade length fits standard replacement blades
 - 6.35mm blade width with 6 TPI ensures clean, efficient cutting in wood

- SPECIFICATIONS:
- Side Emergency Switch
 - Micro Switch
 - Cutting Depth 90mm
 - Cutting Width 230mm
 - Table Size: 305*305mm
 - Table Tilting Range: 0-45°
 - Blade Length: 1575mm
 - Blade Width: 6.35mm
 - Blade Teeth: 6 TPI
 - Dimenstions (L x W x H): 1000mm x 500mm x 500mm
 - Weight: 20kg



Model: BS9



GARRICK Replacement Bandsaw Blades

Bandsaw Blades to suit GARRICK Bandsaw



Model	Bandsaw Model
BSAW100-Blade	Bandsaw Blade to suit GARRICK BSAW100 Bandsaw
BS150W-Blade	Bandsaw Blade to suit GARRICK BS150SW Bandsaw
BS712-Blade	Bandsaw Blade to suit GARRICK BS712 Bandsaw
BS8SW-Blade	Bandsaw Blade to suit GARRICK BS8SW Bandsaw
BS260-Blade	Bandsaw Blade to suit GARRICK BS260 Bandsaw
BS350-Blade	Bandsaw Blade to suit GARRICK BS350 Bandsaw
BS9-Blade	Bandsaw Blade to suit GARRICK BS9 Bandsaw

GARRICK Heavy-duty Industrial Roller Stands

Model: RS-FLAT
Model: RS-V

- RS-Flat suitable for Bandsaws, etc roller length 300mm
- RS-V suitable for Threading Machines, Pipe and Rod, etc



Model	Roller Ø mm	Nett / Gross Weight kg	Operating Height	Max Capacity kg	Measurements mm
RS-Flat	52	15.1 / 16.1	580 - 970	800	530 x 515 x 95
RS-V	52	15.6 / 16.6	580 - 970	800	530 x 515 x 95

GARRICK Heavy-duty Conveyor Roller Tables

Model: RT60-4 (1 metre)
Model: RT60-7 (2 metre)

- Ideal for use with Bandsaws, Cold Saws etc or any other application in general workshop use where a substantial roller table is required
- Available in lengths of 1m or 2m
- Robust clamping system for leg height adjustment
- Fine adjustment facility on feet for easy levelling

Model	RT60-4	RT60-7
Length (m)	1 metre	2 metre
Roller - dia x width (mm)	60 x 360	60 x 360
Operating Height (mm)	650 – 1100	650 – 1100
Max. Capacity Per Table (kg)	400	400
Weight Nett / Gross (kg)	40 / 42	63 / 67
Carton Dimensions (mm)	1030 x 475 x 190	2030 x 475 x 210



ASADA Reciprocating Pipe Saw

Model: PS200SP

- Powerful 1500W (2HP) electric motor
- Cuts up to 8" (200mm) N.B. Pipe
- Variable speed switch (700 - 2,060 spm) permits cutting of wide range of materials including stainless steel
- Double insulated motor and electrical overload protection
- Greater safety with slow speed start function
- Lightweight - at only 3.9 kg makes it suitable for on-site, high or overhead jobs
- Supplied complete with chain vice & spare blades in sturdy carry case



Model	PS200SP
Motor	1300W
Cutting Capacity (mm)	50 - 200mm steel pipe 50 - 150mm stainless pipe
Weight (kg)	3.9



ASADA Spare Blades to Suit Reciprocating Pipe Saw

Model: HSS Thick Blades

Model	Size
SP61210	140MM x 8T
SP61305	200MM x 8T
SP61327	200MM x 6/8T
SP61337	290MM x 6/8T
SP61471	320MM x 6/8T



GARRICK Industrial Drill Presses

Model: DB20
Model: DP20
Model: DP25
Model: DP32

- Square tables for larger work area, with 'T' slots for solid clamping
- Tables tilt and rotate
- Solid one piece Cast Iron operating handles
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Heavy-duty precision depth stops
- Quick action, positive motor adjustment for belt tensioning
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Work light under head (bulb not included for transport reasons)
- Powerful 240V Aluminium TEFC motors
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift



Manufactured to a premium quality standard to suit heavy-duty applications

Model	DB20	DP20	DP25	DP32
Type	Bench	Pedestal	Pedestal	Pedestal
Motor	650W	650W	750W	1100W
Max Drilling Capacity	20mm	20mm	25mm	32mm
Chuck Size (mm)	3 - 16	3 - 16	3 - 16	3 - 16
Swing (mm)	356	356	432	508
Spindle Taper	MT2	MT2	MT3	MT4
Spindle Travel (mm)	80	80	80	120
No. of Speeds	12	12	12	12
Speed Range (rpm)	120 - 2580	120 - 2580	120 - 2580	150 - 2700
Overall Height (mm)	1000	1600	1650	1710
Column Diameter (mm)	80	80	80	92
Quill Diameter	52	52	52	72
Table Dimensions (mm)	290 x 290	290 x 290	345 x 345	475 x 425
Carton Dimensions	840 x 570 x 290	1440 x 570 x 290	1440 x 650 x 320	1475 x 650 x 350
Weight (kg) - Nett / Gross	82 / 86	82 / 86	108 / 117	143 / 153



Model DB20



Model DP20



Model DP25



Model DP32

GARRICK Workshop Drill Presses

Model: DBW16
Model: DPW16
Model: DPW25

- Square tables for larger work area, with 'T' slots for solid clamping
- Tables tilt and rotate
- Solid one piece Cast Iron operating handles
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Heavy-duty precision depth stops
- Quick action, positive motor adjustment for belt tensioning
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Work light under head (bulb not included for transport reasons)
- Powerful 240V Aluminium TEFC motors
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift



Model DBW16

Code	Capacity
DBW16	16mm
DPW16	16mm
DPW25	25mm

Model	DBW16	DPW16	DPW25
Type	Bench	Pedestal	Pedestal
Motor	550W	550W	750W
Max Drilling Capacity	16mm	16mm	25mm
Chuck Size (mm)	3 - 16mm	3 - 16mm	3 - 16mm
Spindle Taper	MT2	MT2	MT3
No. of Speeds	16	16	12
Speed Range (rpm)	180-2770/220-3320	180-2770/220-3320	280-2380/340-2860
Weight	36kg	56kg	60kg
Height	980mm	1600mm	1600mm



Model DPW25



Model DPW16

GARRICK Drill Vice

Model: DV4
Model: DV5
Model: DV6

Garrick's Drill Vice is constructed from a heavy duty cast iron body with machined prismatic steel jaws. A must have tool for machine shops, fabrication workshops & home tool sheds.



GARRICK Drill Sharpener

Model: DS13

Garrick compact drill sharpener is perfect for workshops, fabrication shops and the home hobbyist who requires drill bit sharpening. Perfect for HSS drill bits 3 ~ 13mm or 1/8" ~ 1/2" with a recommended minimum drill length of 85mm.

- Tough plastic construction
- Single chuck holding system
- Can sharpen metric and imperial drill bits
- CBN wheel provides superior grind finish
- Grinds two flute drills of unlimited length
- User friendly hand operated sharpener
- Capable of split point sharpening
- 118° fixed drill point
- 80W, 4200 rpm, 240V motor



We can help with in-store merchandising of **GARRICK HERBERT** products, either with our standard merchandisers or to suit your in-store layout

We can also create standard or custom banners to suit your promotional needs



LINISHALL Bench Grinders

Model: BG8
The Linishall Heavy-duty Industrial Bench Grinder is the first choice for all applications where reliability, long-life and usability are important. Unique adjustable eyeshields to assist in safe, accurate finishing or roughing of all types of componentry, tooling, etc. Optional additions include a pedestal stand, belt and disc grinding attachment and a mitre table.



- All models include as standard a safety E-stop emergency switch
- Wheel dresser
- Adjustable eyeshields
- Cast metal tool rests BG8 & BG250
- Adjustable LED work light BG8
- Pre-loaded bearings (no end play)
- 2850 rpm
- Heavy sheetmetal wheel guards
- Model BG8 now has wider guards to accept 1" (25mm) wide wire wheels



LINISHALL Workshop Bench Grinder

Model: BGW200
The Linishall Workshop bench Grinder is a suitable choice for industrial applications. Features include adjustable eyeshields & emergency stop switch. Optional additions include a pedestal stand, belt and disc grinding attachment and a mitre table.

- Standard safety E-stop emergency switch
- Adjustable eyeshields
- Pre-loaded bearings (no end play)
- 2850 rpm
- Heavy sheetmetal wheel guards
- Wider guards to accept 1" (25mm) wide wire wheels

Model	Grinding Wheel Dia.	Motor	Shaft Dia. (Wheel Bore)	Thread (Nut)
BGW200	200mm (8")	750W (1HP)	16mm (5/8")	M16 x 2.0



LINISHALL Heavy-duty Bench Grinders

Model: BG150
Model: BG8
Model: BG250
The Linishall Heavy-duty Industrial Bench Grinder is the first choice for all applications where reliability, long-life and usability are important. Unique adjustable eyeshields to assist in safe, accurate finishing or roughing of all types of componentry, tooling, etc. Optional additions include a pedestal stand, belt and disc grinding attachment and a mitre table.

- All models include as standard a safety E-stop emergency switch
- Wheel dresser
- Adjustable eyeshields
- Cast metal tool rests BG8 & BG250
- Adjustable LED work light BG8
- Pre-loaded bearings (no end play)
- 2850 rpm
- Heavy sheetmetal wheel guards
- Model BG8 has wider guards to accept 1" (25mm) wide wire wheels

Model	Grinding Wheel Dia.	Motor	Shaft Dia. (Wheel Bore)	Thread (Nut)
BG150	150mm (6")	350W (0.6HP)	12.7mm (1/2")	M12 x 1.75
BG8	200mm (8")	750W (1.0HP)	16mm (5/8")	M16 x 2.0
BG250	250mm (10")	900W (1.2HP)	19.5mm (3/4")	M16 x 1.5



Model: BG150



Model: BG8

- LED Worklight
- Diamond Wheel Dresser



Model: BG250

LINISHALL Combination Wheel & Belt Grinders

Model: BG8/915
Supplied fully assembled & pre-tracked and can be fitted on Pedestal for a complete package


- Model BG8/915 consists of a 915 Belt & Disc Grinding Attachment fitted to the Linishall 8" (200mm) Heavy Duty Bench Grinder
- Secure mounting to ensure smooth finishing operation
- Top platen for flat surface grinding
- 180mm sanding disc
- Grooved contact wheel to avoid belt hop on lap joint belts & cooler operation
- Sealed for life bearings
- Large handle for easy tracking adjustment
- Pre-tracked during assembly by technician
- Emergency "E-STOP" Switch
- Tensioner locking lever designed for easy belt changing
- 50 x 915mm abrasive belts available in a variety of grits and materials to suit grinding such as steel, stainless steel, ceramics, timber, plastics, carbide etc.
- Attachment can be rotated 360 degrees
- New LED Worklight
- New Diamond Wheel Dresser



LINISHALL Belt & Disc Grinding Attachment

Model: 915
Supplied in clear blister packaging with full installation instructions


- Fits easily to most 150mm (6") or 200mm (8") bench grinders
- elt size: 915 mm x 50 mm (36"x2")
- Disc size: 178 mm (7")
- Rugged cast metal construction
- Simple assembly & adjustment
- Longer rubber contact wheel life
- Easy belt tracking with no tools required

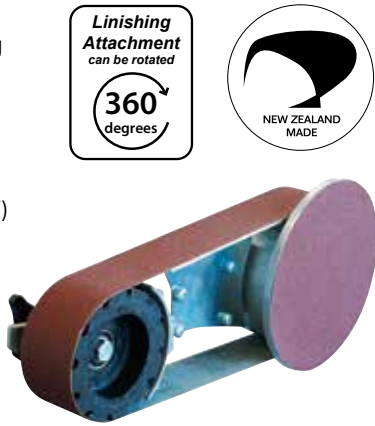

LINISHALL Mitre Table

Model: 915TABLE
Designed to fit the Model 915 Belt & Disc Grinding Attachment

- Side tilting for stable grinding against disc.

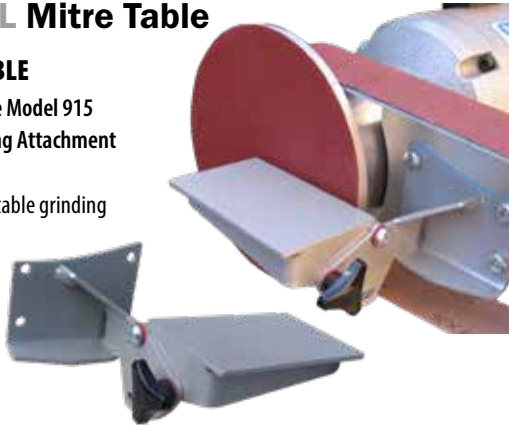

LINISHALL Bench Grinder Stand

Model: BGSHEET
Suitable for mounting Linishall, and most other brand 6", 8" or 10" Bench Grinders

- Sheetmetal construction
- 800mm high



LINISHALL Polisher

Model: BG8BUFF
BG8 grinder fitted with Buff Guards & tapered spindles to take calico mops or similar to create a polishing machine



LINISHALL Buff or Polishing Guard

Model BG8-BUFFGUARD

- Suits most 200mm (8") Grinders
- Fits either RH or LH side
- Includes Dust extraction port (Does not include tapered spindle shown)



LINISHALL Belt Grinding Attachments

Model: 1220/50
Model: 1520/50
Model: 1520/100
Attaches to an electric motor (preferred) or some bench grinders

- Longer Rubber Contact Wheel life with air grooves for cooling
- Easy belt tracking with no tools required
- Drive wheel has 25.4mm (1") bore
- Performance is directly related to motor power - Minimum 750 W (1 HP) recommended
- 3 common belt sizes

Replacement Belts available for all machines 40, 60, 80, 120g




Model	Belt Size	Contact Wheel	Drive Wheel
1220/50	1220mm x 50mm	100mm x 50 mm	185mm x 50mm
1520/50	1520mm x 50mm	100mm x 50 mm	185mm x 50mm
1520/100	1520mm x 100mm	100mm x 100 mm	175mm x 100mm

LINISHALL Bench-mounted Belt Grinding Machines

Model: 1220/50/M1 or M3
Model: 1520/50/M1 or M3
Model: 1520/100/M1 or M3

- Belt Grinding Attachment fitted to a continuous rated 1.1 kW (1.5 HP) TEFC Motor
- Single or 3 Phase option as indicated by model number

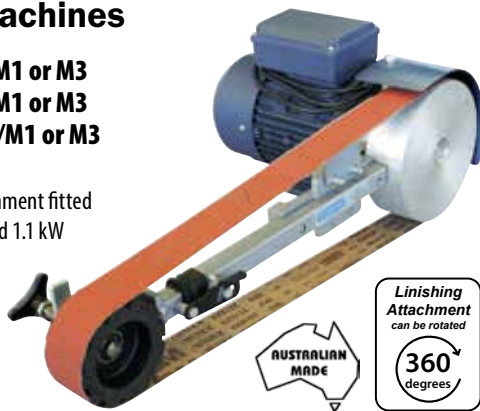

Model	Belt Size	Motor
1220/50/M1	1220mm x 50mm	1 Ph ~ 240V
1220/50/M3	1220mm x 50mm	3 Ph ~ 415V
1520/50/M1	1520mm x 50mm	1 Ph ~ 240V
1520/50/M3	1520mm x 50mm	3 Ph ~ 415V
1520/100/M1	1520mm x 100mm	1 Ph ~ 240V
1520/100/M3	1520mm x 100mm	3 Ph ~ 415V

LINISHALL Pedestal-mounted Belt Grinding Machines

Model: 1220/50/P1 or P3
Model: 1520/50/P1 or P3
Model: 1520/100/P1 or P3

- Belt Grinding Attachment fitted to a continuous rated 1.1 kW (1.5 HP) TEFC motor and mounted on a pedestal to form a free standing machine
- All pedestal units have IP65 rated switchgear fitted which includes thermal overload and no-volt release
- Single or 3 Phase option as indicated by model number.



Model	Belt Size	Motor
1220/50/P1	1220mm x 50mm	1 Ph ~ 240V
1220/50/P3	1220mm x 50mm	3 Ph ~ 415V
1520/50/P1	1520mm x 50mm	1 Ph ~ 240V
1520/50/P3	1520mm x 50mm	3 Ph ~ 415V
1520/100/P1	1520mm x 100mm	1 Ph ~ 240V
1520/100/P3	1520mm x 100mm	3 Ph ~ 415V

LINISHALL Heavy-duty Linishers

Model: 1220/100/P1
Model: 2000/150/P3
Model: 2000/75/P1 or P3
Model: 2000/220/P3

- Fully guarded with hinged flap on top for platen finishing
- Adjustable (by swivelling about pivot point) for height
- 1 or 3 Phase options as indicated by model number
- Front dust chute
- Rear dust extractor port
- Front eye guard
- Tool rests
- Simple tracking & belt change
- 4 belt sizes: 1220 x 100mm, 2000 x 75mm, 2000 x 150mm, 2000 x 220mm

Model: 2000/150/P3 Replacement Belts available for all machines 40, 60, 80, 120g



Model	Belt Size	Motor	Motor Speed (rpm)	Belt Linear Velocity (m/s)
1220/100/P1	1220mm x 100mm	1.5kW (2HP)		
2000/75/P1	2000mm x 75mm	3.0kW (4HP) ~ 1Ph	2800	30
2000/75/P3	2000mm x 75mm	3.0kW (4HP) ~ 3Ph	2800	30
2000/150/P3	2000mm x 150mm	4.0kW (5HP) ~ 3Ph	2800	30
2000/220/P3	2000mm x 220mm	4.0kW (5HP) ~ 3Ph	2800	30

LINISHALL Rubber Contact Wheels

Model: RCW420
Grooved to create air flow
for natural cooling effect



Model	Wheel Size Diameter x Width	Suits	With Spindle
RCW420	100mm x 50mm (4" x 2")	1220/50, 1520/50, 915	
RCW421	100mm x 50mm (4" x 2")	1220/50, 1520/50	Y
RCW421-915	100mm x 50mm (4" x 2")	915 only	Y
RCW440	100mm x 100mm (4" x 4")	1520/100	
RCW441	100mm x 100mm (4" x 4")	1520/100	Y



Model (Wheel only)	Wheel Size	Suits
Y1220/100/P1-CW	122mm dia x 100mm wide (5" x 4")	1220/100/P1 Belt Grinder
Y2000/75-CW	200mm dia x 75mm wide (8" x 3")	2000/75 Belt Grinder
Y2000/150/P3-CW	200mm dia x 150mm wide (8" x 6")	2000/150/P3 Belt Grinder
Y2000/220/P3-CW	200mm dia x 220mm wide (8" x 9")	2000/220/P3 Belt Grinder

LINISHALL Polishing Belt

Model: PB915X50-MED
To suit all Linishall, and most other Belt Grinders
(PB915X50-MED, single pack)



Model	Linishing Belts
PB915X50-MED	Polishing Belt 915x50mm - Medium

LINISHALL Abrasive (Linishing) Belts

To suit all Linishall, and most other Belt Grinders.Pack of 5 (ALUMINIUM OXIDE)

Sizes	Grits
915 x 50	40, 60, 80 or 120G
1220 x 50	40, 60, 80 or 120G
1220 x 100	40, 60, 80 or 120G
1520 x 50	40, 60, 80 or 120G
1520 x 100	40, 60, 80 or 120G
2000 x 75	40, 60, 80 or 120G
2000 x 150	40, 60, 80 or 120G
2000 x 220	40, 60, 80 or 120G

Model	Linishing Belts
LB915X50-40G	915 x 50mm - 40G - Pack of 5pcs
LB915X50-60G	915 x 50mm - 60G - Pack of 5pcs
LB915X50-80G	915 x 50mm - 80G - Pack of 5pcs
LB915X50-120G	915 x 50mm - 120G - Pack of 5pcs

LB915X50-MIXED	915 x 50mm - Mixed Grit - Pack/5pcs
LB1220X50-40G	1220 x 50mm - 40G - Pack/5
LB1220X50-60G	1220 x 50mm - 60G - Pack/5
LB1220X50-80G	1220 x 50mm - 80G - Pack/5
LB1220X50-120G	1220 x 50mm - 120G - Pack/5

LB1220X100-40G	1220 x 100mm - 40G - Pack/5
LB1220X100-60G	1220 x 100mm - 60G - Pack/5
LB1220X100-80G	1220 x 100mm - 80G - Pack/5
LB1220X100-120G	1220 x 100mm - 120G - Pack/5

LB1520X50-60G	1520 x 50mm - 60G - Pack/5
LB1520X50-80G	1520 x 50mm - 80G - Pack/5

LB1520X100-40G	1520 x 100mm - 40G - Pack/5
LB1520X100-60G	1520 x 100mm - 60G - Pack/5
LB1520X100-80G	1520 x 100mm - 80G - Pack/5
LB1520X100-120G	1520 x 100mm - 120G - Pack/5

LB2000X75-40G	2000 x 75mm - 40G - Pack/5
LB2000X75-60G	2000 x 75mm - 60G - Pack/5
LB2000X75-80G	2000 x 75mm - 80G - Pack/5
LB2000X75-120G	2000 x 75mm - 120G - Pack/5

LB2000X150-40G	2000 x 150mm - 40G - Pack/5
LB2000X150-60G	2000 x 150mm - 60G - Pack/5
LB2000X150-80G	2000 x 150mm - 80G - Pack/5
LB2000X150-120G	2000 x 150mm - 120G - Pack/5

LB2000X220-40G	2000 x 200mm - 40G - Pack/5
LB2000X220-60G	2000 x 200mm - 60G - Pack/5
LB2000X220-80G	2000 x 200mm - 80G - Pack/5
LB2000X220-120G	2000 x 200mm - 120G - Pack/5



LINISHALL Sanding Discs Hook & Loop

Linishall Aluminium Oxide Sanding Disc have a hook & loop back for easy installation and are available in a range of grits. The Converter Disc has adhesive on one side and "hooks" on the other to allow replacement of stick-on type sanding discs with "Hook & Loop" backed ones.

- Permits easier disc changing, particularly when using varying grits on a job
- Fits LINISHALL Model 915 and all other machines taking a 178mm (7") disc



Model	Abrasive Discs - Hook Loop
D-H&L-60G	180mm - Hook & Loop - 60G - pack/5
D-H&L-80G	180mm - Hook & Loop - 80G - pack/5
D-H&L-120G	180mm - Hook & Loop - 120G - pack/5
D-H&L-MIXED	180mm - Hook & Loop - Mixed - pack/5

Model	Converter Discs
D-H&L-CONV	Converter Disc 180mm (1 x Hook Self Adhesive Disc)
D-H&L-PACK	Converter Pack 180mm (1 x Hook & Loop Disc) + 5 assorted discs, 60g, 80g & 120g

LINISHALL Sanding Discs Self Adhesive

Linishall Aluminium Oxide Sanding Disc have a self-adhesive back for easy installation and are available in a range of grits.
Suits Linishall 915 Belt & Disc Grinding Attachment and other brands.

- 178mm (7") diameter
- Pack of 5 - 60, 80 or 120G and Mixed Grit
- Stick on type



Abrasive Discs - Self Adhesive	
D-PSA-60G	180mm - PSA - 60G - pack/5
D-PSA-80G	180mm - PSA - 80G - pack/5
D-PSA-120G	180mm - PSA - 120G - pack/5
D-PSA-MIXED	180mm - PSA - Mixed Grit - pack/5



Complete range of accessories
for all your grinding needs and
when longevity, reliability
and usability are important

LINISHALL
Grinding Wheels

In coarse & medium grits.
To suit bench grinders:
ALUMINIUM OXIDE



Model	Wheel Size	Grit	Bore Size
BG6-GW-36G	150mm x 20mm	Coarse	½" (12mm)
BG6-GW-60G	150mm x 20mm	Medium	½" (12mm)
BG8-GW-36G	200mm x 25mm	Coarse	⅝" (16mm)
BG8-GW-60G	200mm x 25mm	Medium	⅝" (16mm)
BG10-GW-36G	250mm x 25mm	Coarse	1¼" (32mm)
BG10-GW-60G	250mm x 25mm	Medium	1¼" (32mm)

LINISHALL
Wire Wheels

To suit bench grinders:
• WW6 150mm (6")
• WW8 200mm (8")
• WW10 250mm (10")
• Includes multi bore bushes



Crimped Brass coated Steel wire

Model	Wheel Size	Bore Size	c/w reducing bushes
WW6	150mm (6")	32mm	Y
WW8	200mm (8")	32mm	Y
WW10	250mm (10")	32mm	Y

LINISHALL Tapered Spindles

To take polishing & buffing mops
Models for:

- BG6 Grinder (M12 thread)
- BG8 Grinder (M16 thread)
- BG10 Grinder (M18 thread)
- Other Grinders (M20 thread)



Model	Left or Right	Grinder Model	Thread Size	Length
LATS12	Set (LH&RH)	BG6	M12	130mm
LATS16	Set (LH&RH)	BG8	M16	145mm
BG10-LHTS	Left	BG10	M18	140mm
BG10-RHTS	Right	BG10	M18	140mm
M20-LHTS	Left	Others	M20	140mm
M20-RHTS	Right	Others	M20	140mm

LINISHALL Buffing Mops

- A polishing (or buffing) mop can be fitted to a bench grinder using a tapered spindle.
- Used in conjunction with the appropriate grade of buffing compound a brighter or polished finish can be obtained.
- The correct mop should be chosen according to the finish required.
- Stitched mops are used for more aggressive buffing for initial polishing or general purpose work
- Loose leaf mops are used to achieve a higher gloss finish and finer polishing

Model	LINISHALL Polishing Mop	Size	Model	LINISHALL Polishing Mop	Size
LAMLL150	Loose Leaf	150mm	LAMST150	Stitched	150mm
LAMLL200	Loose Leaf	200mm	LAMST200	Stitched	200mm



LINISHALL Buffing Compounds

Green Compound: High gloss finish on metal/alloy (stainless steel, copper & brass)

- Use with Loose Leaf Mop

White Compound: Finishing & polishing aluminium and aluminium alloys

- Use with Loose Leaf Mop

Grey Compound: Quick removal of marks/rust/pitting

- Use with Stitched Mop

Red Compound: General purpose metal/alloy

- Use with Stitched or Loose Leaf Mop



Model	LINISHALL Buffing Compound
LABC-GREEN	LINISHALL Buffing Compound - Green
LABC-GREY	LINISHALL Buffing Compound - Grey
LABC-RED	LINISHALL Buffing Compound - Red
LABC-WHITE	LINISHALL Buffing Compound - White

LINISHALL Grinding Wheel Dresser

Model: GWDS1

Grinding wheel dresser size 1



ASADA Pipe & Bolt Threading Machines

Model: B25-AT (Automatic)
Model: B50 (Manual)
Model: B50-AT (Automatic)
Model: B80-AT (Automatic)
Model: B100-AT (Automatic)

- Threading Machines designed to give accurate threads for most pipe and bolt (rod) applications
- BSPT, NPT, BSW, UNC, UNF, Conduit and Metric threads possible in such materials as stainless, high tensile, galvanised and mild steels
- Footswitch included on B50, B80, & B100 machines for safety



Model: B50-AT



Model: B80-AT



Model: B100-AT



Model	Threading Capacity	Motor	Spindle Speed
Beaver 25 (Auto) Dies	¼ - 1" BSPT or NPT Pipe Automatic Die-Head version AM ½~¾", AM 1~1½"	Universal Single Phase 350W	52rpm (No load)
Beaver 50 (Manual) Dies	¼ - 2" BSPT or NPT Pipe Manual Die-Head version BE ½~¾" • BE 1~1½" (2")	Universal Single Phase 750W	40rpm (No load)
Beaver 50 (Auto) Dies	¼" - 2" BSPT or NPT Pipe Automatic Die-Head version BE ½~¾" • BE 1~1½" (2")	Universal Single Phase 750W	40rpm (No load)
Beaver 80 (Auto) Dies	¼" - 3" BSPT or NPT Pipe Automatic Die-Head version BE ½~¾" • BE 1~1½" (2"), AT 2½~3"	Universal Single Phase 1140W	33rpm (No load)
Beaver 100 (Auto) Dies	¼" - 4" BSPT or NPT Pipe Automatic Die-Head version BE ½~¾" • BE 1~1½" (2"), AT 2½~4"	Universal Single Phase 1140W	48 / 18rpm (2 Speed)

NOTE: all machines supplied as standard with all dies & dieheads from 1/2" BSPT up to capacity, cutter, reamer, threading oil and tubular legs. Dieheads and dies for 1/4" - 3/8" BSPT, NPT, Conduit and all bolt sizes are available as optional extras.

ASADA Beaver 50 Trolley Cart

Model B50-FWS

- Portable, Collapsible trolley cart for mounting the ASADA B50-AT & B50 Threading Machines
- Removable working tray for ease of use
- Gas struts for easy raising from collapsed position
- All steel construction, powder coated
- Weight: 26kg



Pictured with Asada Beaver B50-AT and accessories (all sold separately)



In raised position ready for use.



In collapsed position for storage or transportation.



Trolley end view

See pages 45, 46 for Pressure Test Pumps

ASADA Rod/Bolt Threading Machine

Model: BTM25

- Dedicated machine designed specifically for threading bolt and rod
- Faster spindle speed than Pipe Threading Machines
- Rod is held in vice to allow threading of long lengths or bent material
- Machine is for right hand threading only. (A separate machine for left hand threading only is available on request)



Dies available for Stainless or High Tensile Steels



Oil lubrication system and 4 jaw vice clamping

NOTE: supplied as standard with M12 and M14 - M16 dies. (Other sizes available: M8 - M24, BSW, UNC, UNF)

Model	Standard Threading Capacity	Motor size	Spindle Speed
BTM25	8mm -24mm	1 Phase 1140W (1.5HP)	80rpm (No load)

ASADA Neat Threading Oil

Model: SP-OIL-5 (Standard - 5 L)

Model: SP-OIL-20 (Standard - 20 L)

Model: SP-OIL-5HT (High Grade - 5 L)

Model: SP-OIL-20HT (High Grade - 20 L)

- Essential for long die life.
- Includes ingredients to handle the high pressures generated during threading operation
- Standard grade for general purpose threading
- High grade for threading stainless and high tensile steels



ASADA Spare Dies

- Many sizes available: BSPT, NPT, BSPS, Conduit, BSW, Metric, UNC, UNF
- Made from special pre heat-treated steel, ensuring long life and easy threading
- Available in two grades - Alloy for general purpose threading such as black or galvanised pipe & rod and HSS for stainless steels and high tensile steels
- The life of the dies is greatly affected by the quality of cutting oil used, Asada Threading Oil is strongly recommended




Dies to suit Asada Threading Machines

ASADA Spare Diesheads

For pipe, rod and bolt threading machines in all sizes.

- BSPT, NPT, BSW, UNC, UNF, Conduit and Metric threads

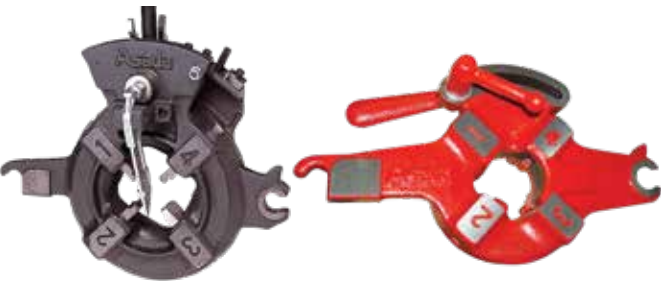

Automatic Diehead for Pipe Machines

Bolt Diehead for Pipe Machines



Bolt Diehead for Bolt Machine

Manual Diehead for Pipe Machines

ASADA Dies & Dieheads Compatibility



DIEHEADS		ASADA MACHINES						
Model	Diehead to Suits ASADA	B25	B50	B50-AT	B80-AT	B100-AT	BTM25	BTM25-L
SDH20158	ASADA Diehead M10 - M24 (to suit Pipe m/c's)		•	•	•	•		
	ASADA Diehead ¼" - ¾" BSPT & NPT - Manual							
SDH63090	ASADA Diehead ½" - 2" BSPT & NPT (Manual)		•	•	•	•		
SDHBE001	ASADA Diehead ½" - 2" BSPT (Auto)			•	•	•		
SDH52200	ASADA Diehead 2.½" - 3" BSPT (Auto)				•			
SDH64200	ASADA Diehead 2.½" - 4" BSPT & NPT (Auto)- B100					•		
SDH10118	ASADA Diehead M8 - M24 (to suit BTM25 & BTM1)						•	
SDH10126	ASADA Diehead BTM1 & BTM25 Left Hand 8-24mm							•
SDHAS109	ASADA Diehead ¼" - ¾" BSPT, ¾"-1 BSW to suit B25 Pipe m/c	•						
SDHBE380	ASADA Diehead ½"-1" BSPT & NPT to suit B25 Pipe m/c	•						
SDHAS110	ASADA Diehead M10 - M24 (to suit B25 Pipe m/c only)	•						
SDH20157	ASADA Diehead 1.½" - " BSPS; Met Cond 40-63mm		•	•	•	•		

PIPE DIES											
Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110
SD89046	ASADA Dies Alloy ¼" - ¾" BSPT	•							•		•
SD89211	ASADA Dies Alloy ½" - ¾" BSPT		•	•							
SDAS086	ASADA Dies Alloy ½" - ¾" BSPT (to suit AST-1 & B25)									•	
SDAS087	ASADA Dies Alloy 1" BSPT (to suit AST-1 & B25)									•	
SD89227	ASADA Dies Alloy 1" - 2" BSPT		•	•							
SD89228	ASADA Dies Alloy 2.½" - 3" BSPT (Auto)				•						
SD59803	ASADA Dies Alloy 2.½" - 4" BSPT (AST Auto)					•					

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110
SD89053	ASADA Dies HSS ¼" - ¾" BSPT	•							•		
SD89203	ASADA Dies HSS ½" - ¾" BSPT		•	•							
SD89248	ASADA Dies HSS 1" - 2" BSPT		•	•							
SD89249	ASADA Dies HSS 2.½" - 3" BSPT (AST Auto)				•						
SD59966	ASADA Dies HSS 2.½" - 4" BSPT (Auto)					•					

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110
SD89100	ASADA Dies Alloy ¼" - ¾" NPT	•									
SD89101	ASADA Dies Alloy ½" - ¾" NPT		•	•							
SD89102	ASADA Dies Alloy 1" - 2" NPT		•	•							
SD89245	ASADA Dies Alloy 2.½" - 3" NPT (Auto)				•						
SD59912	ASADA Dies Alloy 2.½" - 4" NPT (AST Auto)					•					

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110
SD89157	ASADA Dies HSS ½" - ¾" NPT		•	•							
SD89158	ASADA Dies HSS 1" - 2" NPT		•	•							
SD89282	ASADA Dies HSS 2.½" - 3" NPT (Auto)				•						
SD59997	ASADA Dies HSS 2.½" - 4" NPT (Auto)					•					

ASADA Dies & Dieheads Compatibility - Continued

BOLT DIES												
Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110	SDH20157
SD89001	ASADA Dies Alloy M8						●					
SD89002	ASADA Dies Alloy M10	●					●				●	
SD89003	ASADA Dies Alloy M12	●					●				●	
SD89140	ASADA Dies Alloy M14 - M16	●					●				●	
SD89141	ASADA Dies Alloy M18 - M22	●					●				●	
SD89009	ASADA Dies Alloy M24	●					●				●	
SD89192	ASADA Dies Alloy M27 (to suit Pipe m/c's)		●									
SD89193	ASADA Dies Alloy M30-M33 (to suit Pipe m/c's)		●									
SD89194	ASADA Dies Alloy M36 (to suit Pipe m/c's)		●									
SD89234	ASADA Dies Alloy M42 (to suit Pipe m/c's)		●									

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110	SDH20157
SD18522	ASADA Dies HSS M8						●					
SD18523	ASADA Dies HSS M10	●					●			●		
SD18524	ASADA Dies HSS M12	●					●			●		
SD18538	ASADA Dies HSS M14-16	●					●			●		
SD18539	ASADA Dies HSS M18-22	●					●			●		
SD18530	ASADA Dies HSS M24	●					●			●		

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110	SDH20157
SD89164	ASADA Dies L/H Alloy 8mm							●				
SD89165	ASADA Dies L/H Alloy 10mm							●				
SD89166	ASADA Dies L/H Alloy 12mm							●				
SD89167	ASADA Dies L/H Alloy 14-16mm							●				
SD89168	ASADA Dies L/H Alloy 18-22mm							●				
SD89169	ASADA Dies L/H Alloy 24mm							●				

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110	SDH20157
SD18556	ASADA Dies L/H HSS 8mm							●				
SD18541	ASADA Dies L/H HSS 10mm							●				
SD18542	ASADA Dies L/H HSS 12mm							●				
SD18543	ASADA Dies L/H HSS 14-16mm							●				
SD18544	ASADA Dies L/H HSS 18-22mm							●				
SD18555	ASADA Dies L/H HSS 24mm							●				

Model	ASADA Dies	SDH20158	SDH63090	SDHBE001	SDH52200	SDH64200	SDH10118	SDH10126	SDHAS109	SDHBE380	SDHAS110	SDH20157
SD89079	ASADA Dies Alloy 5/16" BSW						●					
Various	ASADA Dies Alloy from 5/16" to 1" BSW	●					●				●	
SD18503	ASADA Dies HSS 5/16" BSW	●					●					
Various	ASADA Dies HSS from 3/8" to 1" BSW	●					●				●	

Various	ASADA Dies Alloy from 3/8" to 1" UNC	●					●				●	
---------	--------------------------------------	---	--	--	--	--	---	--	--	--	---	--

Various	ASADA Dies Alloy from 3/8" to 1" UNF	●					●				●	
---------	--------------------------------------	---	--	--	--	--	---	--	--	--	---	--

SD89110	ASADA Dies Metric Conduit 16mm - 20mm		●									
SD89111	ASADA Dies Metric Conduit 25mm - 32mm		●									
SD89209	ASADA Dies Metric Conduit 40mm - 63mm											●

ASADA Nipple Chuck Set

Model: NC01810-ASADA

Capacity 1/2" - 2" BSPT


- Easy operation – Nipple will not jam in the chuck for release after threading the nipple
- Can be used in all brands of threading machines - does not suit Beaver 25
- Includes 1/2", 3/4", 1", 1 1/4" & 1 1/2" & 2", handle, shaft, case



GARRICK Portable Power Pipe Threaders

Model: PPT2 (1/2" - 2") BSPT

- Designed for versatile power threading without a separate vice
- Suitable for "on-site" applications
- Supplied with die-heads 1/2", 3/4", 1", 1.1/4", 1.1/2", 2"
- Right and left hand threads can be cut with equal ease
- Robust carrying case
- Spare dieheads and dies available
- Weight 25.5kg
- Size: 74 x 44 x 12 cm
- Made in Taiwan

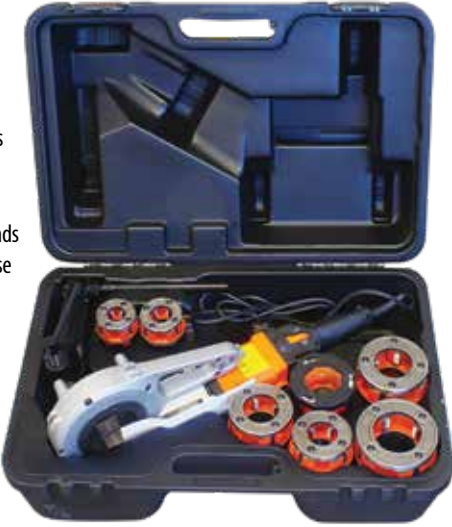

GARRICK Hand Ratchet Pipe Threaders

Model: HRT100 (1/2" - 1")

Model: HRT125 (1/2" - 1.1/4")

Model: HRT200 (1/2" - 2")

For portable and easy threading in small confines.
Design of lead chamfer on dies gives easier thread starting.

- 3 size sets available
- Supplied with BSPT Dies (NPT Dies available)
- Quality HSS Dies
- Spare Dieheads & Dies available
- Dieheads & Dies interchangeable with most leading brands
- All sets supplied in a robust carry case

Model	Die-Heads Supplied
HRT100	1/2", 3/4", 1"
HRT125	1/2", 3/4", 1, 1.1/4"
HRT200	1/2", 3/4", 1, 1.1/4, 1.1/2, 2"



ASADA Reciprocating Pipe Saw

Model: PS200SP

- Powerful 1500W (2HP) electric motor
- Cuts up to 8" (200mm) N.B. Pipe
- Variable speed switch (700 - 2,060 spm) permits cutting of wide range of materials including stainless steel
- Double insulated motor and electrical overload protection
- Greater safety with slow speed start function
- Lightweight - at only 3.9 kg makes it suitable for on-site, high or overhead jobs
- Supplied complete with chain vice & spare blades in sturdy carry case



ASADA Spare Blades to Suit Reciprocating Pipe Saw

Model: HSS Thick Blades

Bi Metal Blades - Steel, Stainless Steel, Aluminium

Model	Size
SP61210	140MM x 8T
SP61305	200MM x 8T
SP61327	200MM x 6/8T
SP61337	290MM x 6/8T
SP61471	320MM x 6/8T

GARRICK Footswitch

Model: FS

- Fits all Asada pipe and bolt threading machines
- Hands-free threading operation
- Simple to fit



GARRICK Manual Pressure Test Pump

Model: TPRP50

- Durable, precision unit for accurately testing all tube/pipe systems & pressure vessels. Working parts rust-proofed, 12L tank is galvanised, epoxy coated
- Large capacity pressure testing pump
- Double check valves with stainless steel ball seats
- Accurate readings up to 50 bar / 700 psi
- 12 litre tank capacity



ASADA Electric Pressure Test Pump

Model: EP440

Ideal for leak testing of pipes, tanks, valves & joints

- Hydrostatic pressure
- Self-priming
- Over-load protection
- Max. pressure 40Kgf/cm2(568.9psi)
- Discharge water volume: 3.0L/min(50Hz) - 3.7L/min(60Hz)
- Light weight - Only 9 Kg

INCLUDES:

- High pressure 1m hose
- Suction hose 2.6m
- Filter
- Relief hose 3m
- Wrench 2pcs
- Carry case



GARRICK Roll Groover

Model: RG916

- Compact, durable and efficient lightweight roll grooving attachment
- Fits to most Threading Machines including Portable Power Threaders
- Up to 6" N.B. pipe capacity
- Easy operation with ergonomic handle to apply pressure to wheels



GARRICK Roll Groover Adapter & Drivebar

Model: RGAR916

To fit onto the ASADA B50 Threading Machine so the RG916 Roll Groover (above) can be used.



Roll Groovers are used to make a grooved mechanical joining of two pipes. A small groove is made at the end of each pipe with a grooving machine. A rubber gasket is fitted over the two pipe ends and around it a two-part coupling is screwed together with two bolts and nuts.

It is often called a Victaulic Coupling after the inventor of the system. As opposed to threaded joints, it allows for a small amount of misalignment of the pipes or later removal of a section of piping in the middle of a run.

GARRICK Hydraulic Roll Groovers

Model: RG6C - 1.1/4" - 6"
Model: RG12E - 2"-12"

- Powerful yet quiet motor
- Fine adjustment for groove depth and regulation
- Compact and very stable machine design

INCLUDES:

- Pipe Roller V stand as pictured



Model	Grooving Capacity	Electric Motor	Dimensions (mm)
RG6C	Sch10 1.1/4"-6", Sch40 1.1/4"-3"	550W 24 rpm	630 x 40 x 630
RG12E	Sch10 2"-12", Sch40 2"-6"	750W 24 rpm	630 x 40 x 630

GARRICK Power Drive

Model: PD

- Use as a power source in conjunction with RG916 & RG12A Roll Grooving attachments.
- Single-phase 1500w (2HP) universal electric motor - 38 rpm
- Includes sturdy tripod & footswitch



ASADA Roll Groover

Model: GR641
Model: GR642
Model: GR643

DESCRIPTION

- GR641 - ASADA 6" cap. Roll Grooving Attachment to suit B50
- GR642 - ASADA 6" cap. Roll Grooving Attachment to suit B80
- GR643 - ASADA 6" cap. Roll Grooving Attachment to suit B100

- Grooves up to 6" (150mm) N.B Sch. 40 pipe
- Standard unit supplied with roller/shaft set to suit 2" - 6" pipe
- Optional roller shaft set for 1" - 1 1/2" pipe



GARRICK Roll Grooving Attachment

Model: RG12A

- Fits on GARRICK Power Drive (Model PD), or other brands
- Powerful unit with 10 ton hydraulic ram
- Grooving Capacity:
 - Sch10 2"-12"
 - Sch40 2"-8"

Shown fitted to a PD GARRICK Power Drive



GARRICK Pipe Stand

Model: RS-V

- For supporting material that is being worked on, especially long lengths

Model	Roller Ø mm	Nett / Gross Weight kg
RS-V	52	15.6 / 16.6

Operating Height	Max Capacity kg	Measurements mm
580 - 970	800	530 x 515 x 95



GARRICK Chain Vices

2.5" & 6" Models

Quick Release Chain Vice with lever action to tighten or release the chain. Easily adapts to stands and work benches.

- Forged steel jaws
- Cast iron base

Model	Capacity
CV2.5	2.5" (63mm)
CV6	6" (150mm)



GARRICK Portable Work Stand

Model: TSCV

- Includes chain pipe vice up to 6" (150mm) N.B pipe capacity
- Collapsible workbench in aluminium
- Can be used with any kind of pipe
- Includes tray fold in for easy carrying and setup
- Includes slots for hanging tools



GARRICK Mini Chain Block

A compact & lightweight chain block for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Test Certificate & Instruction Manual supplied with every Chain Block
- Compact - minimum headroom (hook to hook = 230mm)
- Lightweight robust construction - only 3.5 kg



Model	Size	Lift
GCB0022	0.25T	2 m

GARRICK Mini Lever Hoists

Compact & lightweight Lever Hoists for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Test Certificate & Instruction Manual supplied with every Mini Lever Hoist
- Compact - minimum headroom (hook to hook)
- Lightweight robust construction - from only 2 kg



Model	Capacity	Lift	Headroom	Weight
GLH025	0.25T	1.5 m	215 mm	2 kg
GLH050	0.5T	1.5 m	255 mm	3.5 kg

Need a different chain length?

We can re-chain any block or hoist to almost any length of lift required



GARRICK Chain Blocks- Load Limited

Models from 0.5 T to 10 T ex. stock (larger sizes available ex. factory)

- Overload Protection facility is factory set to prevent abuse, damage or unsafe practice
- Robust all steel construction
- Super strength alloy steel chain
- All hooks fitted with spring safety latch
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Chain Block
- Comply with AS/NZS1418.2 (Meets or exceeds all relevant world standards)

Model	Size	Lift
GCBLL0053	0.5T	3m
GCBLL0056	0.5T	6m
GCBLL0103	1T	3m
GCBLL0106	1T	6m
GCBLL0203	2T	3m
GCBLL0206	2T	6m
GCBLL0303	3T	3m
GCBLL0306	3T	6m
GCBLL0503	5T	3m
GCBLL0506	5T	6m
GCBLL1006	10T	6m



GARRICK Lever Hoists - Load Limited

Models from 0.75 T to 6 T ex. stock (larger sizes available ex. factory)

- Overload Protection facility is factory set to prevent abuse, damage or unsafe practice
- Robust all steel construction
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Durable stainless steel labels
- Test Certificate & Instruction Manual supplied with every Lever Hoist
- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)

Model	Size	Lift
GLHLL075	0.75T	1.5 m
GLHLL150	1.5T	1.5 m
GLHLL300	3T	1.5 m
GLHLL600	6T	1.5 m



TOHO Chain Block

Stainless Steel
Stainless steel chains blocks are required in many different industries where a sterile environment is required. It is suitable for food manufacturing, medical and pharmaceutical as well as marine / chemical industries and other highly corrosive environments.

- Light weight, easy to operate by worker
- Treated by special anti-corrosion technology
- Salt spray test over 1000 hours - will last 25 times longer than regular chain block
- Test Certificate & Instruction Manual supplied with every Chain Block
- Industrial quality - complies with AS / NZS 1418.2
- Grade 50 stainless steel chain



Scan for specs



Model	Size	Lift	Chain Size mm	No of Chains
TCBSS1T3M	1T	3m	7 x 21	1
TCBSS1T6M	1T	6m	7 x 21	1
TCBSS2T3M	2T	3m	7 x 21	2
TCBSS2T6M	2T	6m	7 x 21	2

TOHO Chain Block

Aluminium

- Lightweight Aluminium construction 2.4kg
- Compact and portable design
- Enclosed cover, anti-dust, anti-corrosion
- Test Certificate & Instruction Manual supplied with every Chain Block
- Industrial quality - complies with AS / NZS 1418.2



Scan for specs



Model	Size	Lift	Chain Size mm	No of Chains
TCBALI-025T2.5M	0.25T	2.5m	3.2 x 9	1
TCBALI-05T2.5M	0.5T	2.5m	4 x 12	1

GARRICK Chain Slings

Grade 80 Double Leg - Latch Type Hook with shorteners

- Grade 80 Chain with Latch type Sling Hooks
- 2 x shorteners Grade 80 chain with G80 Shortening Grab Hooks Approved Standards AS 3775.1
- Supplied with test certificate



MODEL TYPES

Model	Length	Chain Size	WLL 1	WLL 2	WLL @60°	WLL @90°	WLL @120°
CS2X08	2	8	2.0	1.5	3.5	2.8	2.0
CS2X10	2	10	3.2	2.4	5.5	4.5	3.2
CS2X13	2	13	5.3	4.0	9.2	7.5	5.3
CS3X08	3	8	2.0	1.5	3.5	2.8	2.0
CS3X10	3	10	3.2	2.4	5.5	4.5	3.2
CS3X13	3	13	5.3	4.0	9.2	7.5	5.3
CS4X08	4	8	2.0	1.5	3.5	2.8	2.0
CS4X10	4	10	3.2	2.4	5.5	4.5	3.2
CS4X13	4	13	5.3	4.0	9.2	7.5	5.3
CS6X08	6	8	2.0	1.5	3.5	2.8	2.0
CS6X10	6	10	3.2	2.4	5.5	4.5	3.2
CS6X13	6	13	5.3	4.0	9.2	7.5	5.3

GARRICK Vehicle & Trailer Safety Chain Hook Set - Grade 100

Model: GSCHS6MM
Model: GSCHS8MM

- Available In 2 Sizes
- Fast, Secure & Compliant Chain Connection
- Now 25% Stronger With G100 Fittings.

GSCHS6MM – For 8mm Trailer Chains

- Max Towing (Atm): 2800kg Combined
- Min Breaking Strength: 4480kg Per Hook

GSCHS8MM – For 10–13mm Trailer Chains

- Max Towing (Atm): 5000kg Combined
- Min Breaking Strength: 8000kg Per Hook

KIT INCLUDES:

- 2x Hammerlocks
- 2x Eye Sling Hooks With Safety Latch

FEATURES

- Grade 100 – Drop Forged & Powder Coated
- Certified To As3776 & Adr62/02
- 4:1 Safety Factor
- Galvanised Finish With Yellow Pins
- Ideal For Marine, Ag, Towing & Industrial Use




GARRICK Grade S Bow Shackles

Yellow Screw Pin - Bow type

- Bow Shackles Galvanised – Grade S
- Compliant and meet the requirement of AS 2741.
- The most common shackles used in lifting applications, with a high strength to size ratio.
- Easy and effective way of providing a connection of slings, chains and wire ropes.
- Supplied in a galvanised finish with yellow painted pin.
- Suitable applications: Marine, agricultural, towing, & general industrial.



Bow Shackles
Grade S 0.5T - 25T

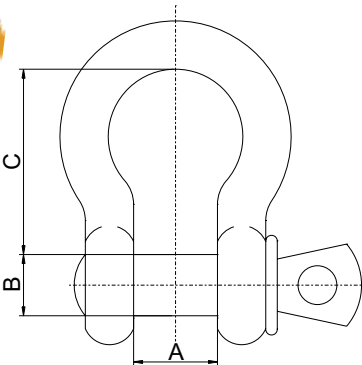


A	Throat Opening
B	Pin Diameter
C	Throat Depth

GARRICK Grade S Dee Shackles

Yellow Screw Pin - Dee type

Conforms to AS3776-2015, AS4177.4 & ADR6202

- Compliant to meet Industrial Standards
- The most common shackles used in lifting applications, with a high strength to size ratio
- Easy and effective way of providing a connection of slings, chains and wire ropes
- Supplied in a galvanised finish with yellow painted pin
- Suitable applications: Marine, agricultural, towing & general industrial



A	Throat Opening
B	Pin Diameter
C	Throat Depth

Dee Shackles Grade S 0.5T - 6.5T


Model	Body Dia. (mm)	W.L.L. (T)	Dimension (mm)		
			A	B	C
GSSD06-0.5T	6	0.5	12	8	25
GSSD08-0.75T	8	0.75	13	10	27
GSSD10-1.0T	10	1	17	11	33
GSSD11-1.5T	11	1.5	18	13	38
GSSD13-2.0T	13	2	21	16	42
GSSD16-3.2T	16	3.2	27	19	52
GSSD19-4.7T	19	4.7	32	22	61
GSSD22-6.5T	22	6.5	37	25	73

18.456 mm	Body Dia. (mm)	W.L.L.(T)	Dimension (mm)		
			A	B	C
GSSB06-0.5T	6	0.5	12	8	25
GSSB08-0.75T	8	0.75	13	10	27
GSSB10-1.0T	10	1	17	11	33
GSSB11-1.5T	11	1.5	18	13	38
GSSB13-2.0T	13	2	21	16	42
GSSB16-3.2T	16	3.2	27	19	52
GSSB19-4.7T	19	4.7	32	22	61
GSSB22-6.5T	22	6.5	37	25	73
GSSB25-8.5T	25	8.5	43	29	82
GSSB29-9.5T	29	9.5	46	32	92
GSSB32-12T	32	12	52	35	101
GSSB35-13T	35	13	57	38	113
GSSB38-17T	38	17	60	41	123
GSSB44-25T	44	25	73	51	147

TOHO Girder Trolley Stainless Steel

Robust stainless steel construction
Adjustable to various beam widths
Durable stainless steel labels
Standard steel bearings

- Comply with AS/NZS 4991
- Meet or exceed other International Standards such as GS, CE & ANSI
- Test Certificate & Instruction Manual supplied with every Trolley



Models	GPTSS1T	GPTSS2T
Dimension (mm)		
A	246	280
B	239	270
C	214	248
H	120	145
Min. Turning radius m	1.0	1.1
Flange width mm	64-203	88-203

Model	Size	Style	Beam
GPTSS1T	1T	Push	64-203mm
GPTSS2T	2T	Push	88-203mm



GARRICK Girder Trolleys

Models from 0.5T to 10T

- Robust all steel construction
- Adjustable to various beam widths
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Trolley
- Comply with AS/NZS 4991
- Meet or exceed other International Standards such as GS, CE & ANSI



Push type

Model	Size	Style	Beam
GPT005	0.5T	Push	64-152mm
GPT010	1T	Push	64-210mm
GPT020	2T	Push	88-210mm
GPT030	3T	Push	102-210mm
GPT050	5T	Push	114-210mm

Model	Size	Style	Beam
GGT010	1T	Geared	64-210mm
GGT020	2T	Geared	88-210mm
GGT030	3T	Geared	102-210mm
GGT050	5T	Geared	114-210mm
GGT100	10T	Geared	125-210mm



Geared type

GARRICK Girder Clamps

Models from 1T to 10T

- Robust all steel construction
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Clamp
- Comply with AS/NZS 1418.2
- Meet or exceed other International Standards such as GS, CE & ANSI



Model	Size	Beam
GGC010	1T	75-230mm
GGC020	2T	75-230mm
GGC030	3T	80-320mm
GGC050	5T	90-320mm
GGC100	10T	90-320mm

GARRICK Universal Plate Clamps

Models from 0.8T to 5T

- Robust all steel construction
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Clamp
- Comply with AS/NZS 1418.2
- Meet or exceed other International Standards such as GS, CE & ANSI



Articulated knuckle on eye permits plate to be laid flat i.e. can be used as horizontal or vertical plate clamp

Model	Size	Opening
GVC008	0.8T	0 - 15mm
GVC016	1.6T	0 - 20mm
GVC020	2.0T	0 - 25mm
GVC032	3.2T	0 - 30mm
GVC050	5.0T	0 - 50mm

GARRICK Permanent Magnet Lifter

Magnetic lifters are devices that maximize the use of magnetic fields to grab and hoist metallic materials

Permanent magnetic lifters, on the other hand, generate high magnetic power using high-grade Neodymium magnets and mild steel.

They are ideally used to lift metallic materials such as plates and blocks without the need for drilling holes or the risk of damaging its surface. V shaped slot on holding surface for cylindrical work pieces.

Permanent Magnet Lifter		
Model	Capacity (kg)	Max Pull off Strength (kg)
GML-400	400	1400
GML-600	600	2100
GML-1000	1000	3500



GARRICK Vertical Drum Clamp

Model: GDCV

The Garrick Drum Clamp has been designed to lift and transport steel & plastic drums in the vertical position. One clamp can be used to lift drums with or without their lids by gripping the rim of the drum.

- Its lightweight and small overall design makes it ideal for picking up drums that sit tightly on pallets
- The centre of gravity of the drum is below the lifting point during transportation.
- Complies with AS/NZS 1418.2



GARRICK Chain & Clamp Drum Lifter

- Alloy steel chain
- Lifting capacity 10000kg
- High grade hooks
- Built to industrial standards
- Complies with AS/NZS 1418.2



FOR EASY LIFTING & TILTING
OF 20, 60 & 205L DRUMS

GARRICK Ute Crane 12 Volt-500/800kg

UTECRANE500

Utility crane is lightweight, portable & compact design for mounting onto ute's, service bodies, vans, trucks, loading docks, platforms for lifting goods on and off up to 500kg with a single line lift via the powerful 12 volt DC winch.

FEATURES

- 800kg capacity, when set up with double line lifting (@ 930mm boom setting)
- 500kg capacity, when set up with single line lifting (@ 930mm boom setting)
- 3 position telescoping boom: 500kg @ 930mm, 250kg @ 1180mm, 100kg @ 1430mm when set up with single line lifting
- 3 boom elevation angles: 3°, 20°, 40°, raised manually
- 3.6m/min lift speed with no load & single line lift
- 360° continuous manual rotation of sealed thrust bearing
- Lifting electric winch: 12V DC 125 amps
- Storage height folded (from base to hook): 1940mm - (Max lift 3 mtr)
- Lifting height (base to hook): 1940mm - (Max lift 3 mtr)
- 250 x 250 x 16mm mounting base plate with 170 x 170mm bolt hole centres
- Hand control with 4.2 metre cable
- Rotation hand lock



TOHO Pro Mini Electric Hoist 500kg capacity Single Phase/240V

Model: TPMEH500
Features 4-position quick cam action clamping

- Running time is 3 times longer than a normal mini hoist
- Lifting Speed 10m p/min when using single line or 5m p/min when using double line
- Up/down controls with emergency stop button
- Lifting height 12m on single rope or 6m using double rope
- Automatic brake/cut off
- Anti-heat device on motor
- Single rope capacity 250kg
- Double rope capacity 500kg
- 900w motor



IP RATING:
Hoist - IP54
Control - IP65

TOHO Digital Crane Scale

Garrick Digital Crane Scale's are available in 5 capacities; 1T, 2T, 5T, 10T and 15T

Built for industrial and commercial use with a OIML rating of III. Unlike other models on the market, Garrick Digital Crane Scales come with an infrared remote control.

Being relatively light weight, Digital Crane Scale's provide a safe and effective method of weighing goods to the specified rating per model.



All Garrick Digital Crane Scales come with the following features:

- 6V Rechargeable battery
- Bright 30mm LED display for long range viewing
- Heavy duty components; alloy steel load components, steel impact resistant casing, stainless steel panel buttons.
- Infrared remote control with a range of at least 10m
- Operational in a wide range of temperatures (10 degree to 40 degree)
- 120% safe load capacity and 500% ultimate load of rated capacity
- Accuracy Level rated at OIML Class rating III - scales are designed for industrial or commercial use with readings within 0.1 to 2g

Digital Crane		
Model	Capacity (t)	Weight KG
DCS-1T	1	12
DCS-2T	2	13
DCS-5T	5	16
DCS-10T	10	26
DCS-15T	15	40


TOHO Electric Chain Hoist /Single Phase

Model: TECH0053
500kg 3mtr Electric Chain Hoist

Need a simple lift to do all the heavy lifting for you? Toho Electric Chain Hoist is the perfect solution! Toho Hook Suspension Electric Chain Hoist is portable and can be hooked onto any safe mounting point to lift heavy objects such as pallets, engines and many more items (which are safely strapped).

The Toho Hook Suspension Electric Chain Hoist is perfect for warehouses, garages and mechanics.

- Features:
- Load limited gear
 - Light weight, compact design with high efficiency motor
 - Pressed steel structure, high strength body
 - High tensile alloy steel top & bottom hooks

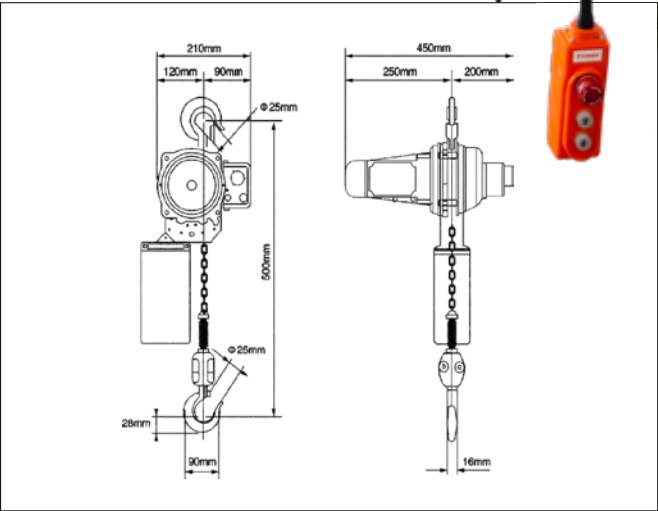

1-phase, 240v, 50Hz (Single Speed)	
Model	TECH0053
Capacity tonne	0.5
Standard Lift M	3
Running Test Load kN	6.25
Motor Power (kW)	1.3
No. of Chain	1
Dia of Chain mm	6.3
Lifting Speed (m/min)	5
Net Weight kg	19
Extra weight p/m of extra lift kg	.81

TOHO Electric Chain Hoists/Single Phase

- Load Limited
- Thermal Prevention
- Light weight, compact design with high efficiency motor
- Pressed steel structure, high strength body
- High tensile alloy steel top & bottom hooks
- Grade 80 - Alloy Steel load chain
- Limit switches fitted at top and bottom ends to prevent chain runout
- 240V, 50Hz Dual speed Motor 1200 Watts, (Single Phase)
- Complies with AS/NZS 1418.2 standard
- Other lengths available
- **Optional wireless remote can be purchased.**



HOISTS CAN BE RE-CHAINED TO YOUR REQUIRED LENGTH (LIMITS APPLY)



Japanese Technology
Load limited
Thermal overload prevention
Emergency Stop button

1-phase, 240v, 50Hz (Single Phase)											
Model	Capacity ton	Standard Lift M	Running Test Load kN	Motor Power	No. of Chain	Dia of Chain mm	Lifting Speed (m/min)	Trolley Speed m/min	Size of I-Beam mm	Net Weight kg	Extra weight per metre of extra lift kg
TECH0103	1	3	12.5	1.2kW	1	7.1	6/2			60	1.1
TECH0106	1	6	12.5	1.2kW	1	7.1	6/2			63	1.1
TECH0203	2	3	25	1.2kW	2	7.1	3/1			65	2.2
TECH0206	2	6	25	1.2kW	2	7.1	3/1			71	2.2
TECH0206-ET	2	6	25	1.2 kW	2	7.1	3/1	20	74-124	107	
TECH-RP	Remote Pendant Control to suit TOHO Single Phase Electric Chain Hoist (Must be fitted, there is a 1.5hrs Labour Charge)										

TOHO Electric Chain Hoist with Trolley/Single Phase

- The electric trolley offers a long and reliable operation
- Compact structure, light weight, easily operation and attractive appearance.
- Widely used in factories, mines, ports, shopping centres and warehouse.



IP RATING:
Hoist - IP54
Control - IP65



TECH-RP Optional remote control unit available, suits below models only
The remote control distance (no shielding) is 70m.

IP RATING:
Remote control - IP55




TOHO Electric Chain Hoist

3 Phase - More lengths available

- Load Limited
- 2 speeds
- Thermal Prevention
- Light weight, compact design with high efficiency motor
- Pressed steel structure, high strength body
- High tensile alloy steel top & bottom hooks
- Grade 80 - Alloy Steel load chain
- Limit switches fitted at top and bottom ends to prevent chain runout
- 415V, 50Hz Dual speed Motor (3 Phase)
- Complies with ASNZS 1418.2 standard
- **Optional wireless remote can be purchased.**

IP RATING: Hoist - IP54 / Control - IP65
HOISTS CAN BE RE-CHAINED TO YOUR REQUIRED LENGTH (LIMITS APPLY)





CODE	DESCRIPTION
TECH-3PH-2SP-0103	TOHO Electric Chain Hoist 1T/3M Three Phase 2 Speed
TECH-3PH-2SP-0106	TOHO Electric Chain Hoist 1T/6M Three Phase 2 Speed
TECH-3PH-2SP-0203	TOHO Electric Chain Hoist 2T/3M Three Phase 2 Speed
TECH-3PH-2SP-0206	TOHO Electric Chain Hoist 2T/6M Three Phase 2 Speed
TECH-3PH-2SP-0303	TOHO Electric Chain Hoist 3T/3M Three Phase 2 speed
TECH-3PH-2SP-0306	TOHO Electric Chain Hoist 3T/6M - Three Phase 2 speed
TECH-3PH-2SP-0503	TOHO Electric Chain Hoist 5T/3M Three Phase 2 speed
TECH-3PH-2SP-0206-ET	TOHO Electric Chain Hoist 2T/6M Three Phase 2 Speed
TECH-3PH-2SP-0306-ET	TOHO Electric Chain Hoist 3T/6M Three Phase 2 Speed
TECH-3PH-2SP-0503T-ET	TOHO Electric Chain Hoist 5T/3M Three Phase 2 Speed

3-phase, 415v, 50Hz (dual speed)										
MODEL	Capacity tonne	Standard Lift M	Running Test Load kN	Motor Power (kW)	No. of Chain	Dia of Chain mm	Lifting Speed (m/min)	Net Weight kg	Extra weight p/m of extra lift kg	Beam Size (mm)
TECH-3PH-2SP-0103	1	3	12.5	1.8/0.6	1	7.1	1.2/3.5	61	1.1	
TECH-3PH-2SP-0106	1	6	12.5	1.8/0.6	1	7.1	1.2/3.5	68	1.1	
TECH-3PH-2SP-0203	2	3	25	3/1	1	10	6.8/2.3	115	2.3	
TECH-3PH-2SP-0206	2	6	25	3/1	1	10	6.8/2.3	125	2.3	
TECH-3PH-2SP-0303	3	3	37.5	3/1	1	11.2	5.4/1.8	122	2.8	
TECH-3PH-2SP-0306	3	6	37.5	3/1	1	11.2	5.4/1.8	135	2.8	
TECH-3PH-2SP-0503	5	3	62.5	3/1	2	11.2	2.7/0.9	151	5.6	
TECH-3PH-2SP-0206-ET	2	6	25	3/1	1	10	6.8/2.3	170	2.3	82-178
TECH-3PH-2SP-0306-ET	3	6	37.5	3/1	1	11.2	5.4/1.8	181	2.8	100-178
TECH-3PH-2SP-0503-ET	5	3	62.5	3/1	2	11.2	2.7/0.9	220	5.6	100-178

TOHO Compact Wire Rope Builders Hoist

Specifically designed to hang from scaffold tubing to lift materials to and from different levels on a building site.
Available in 250kg, 360kg & 500kg models.
Top hook assembly is suitable size to fit standard 48.3mm dia. scaffolding pipe.

- 30 mtr lift
- auto stop feature
- heavy duty construction
- scaffolding safety latch
- 240 volt 3 pin plug power supply
- Complies with ASNZS 1418.7 standard

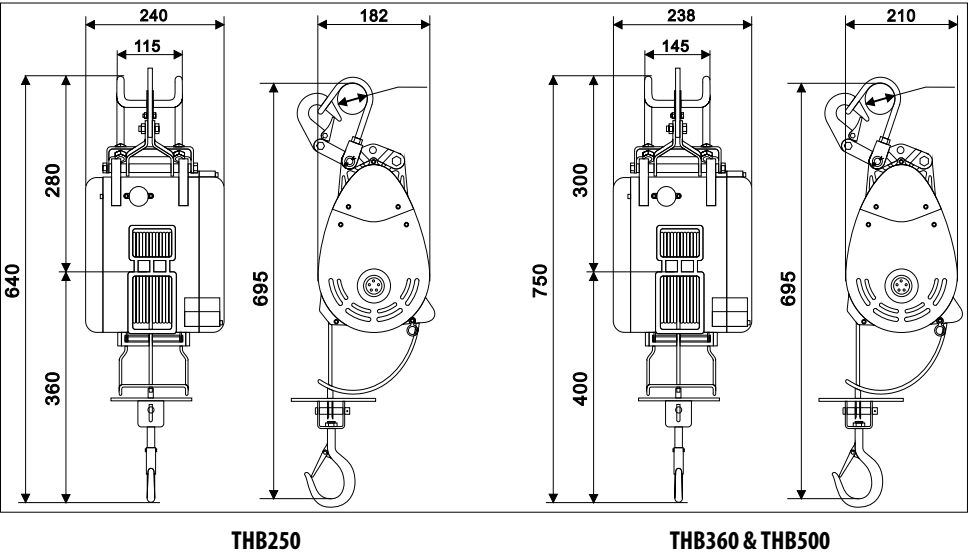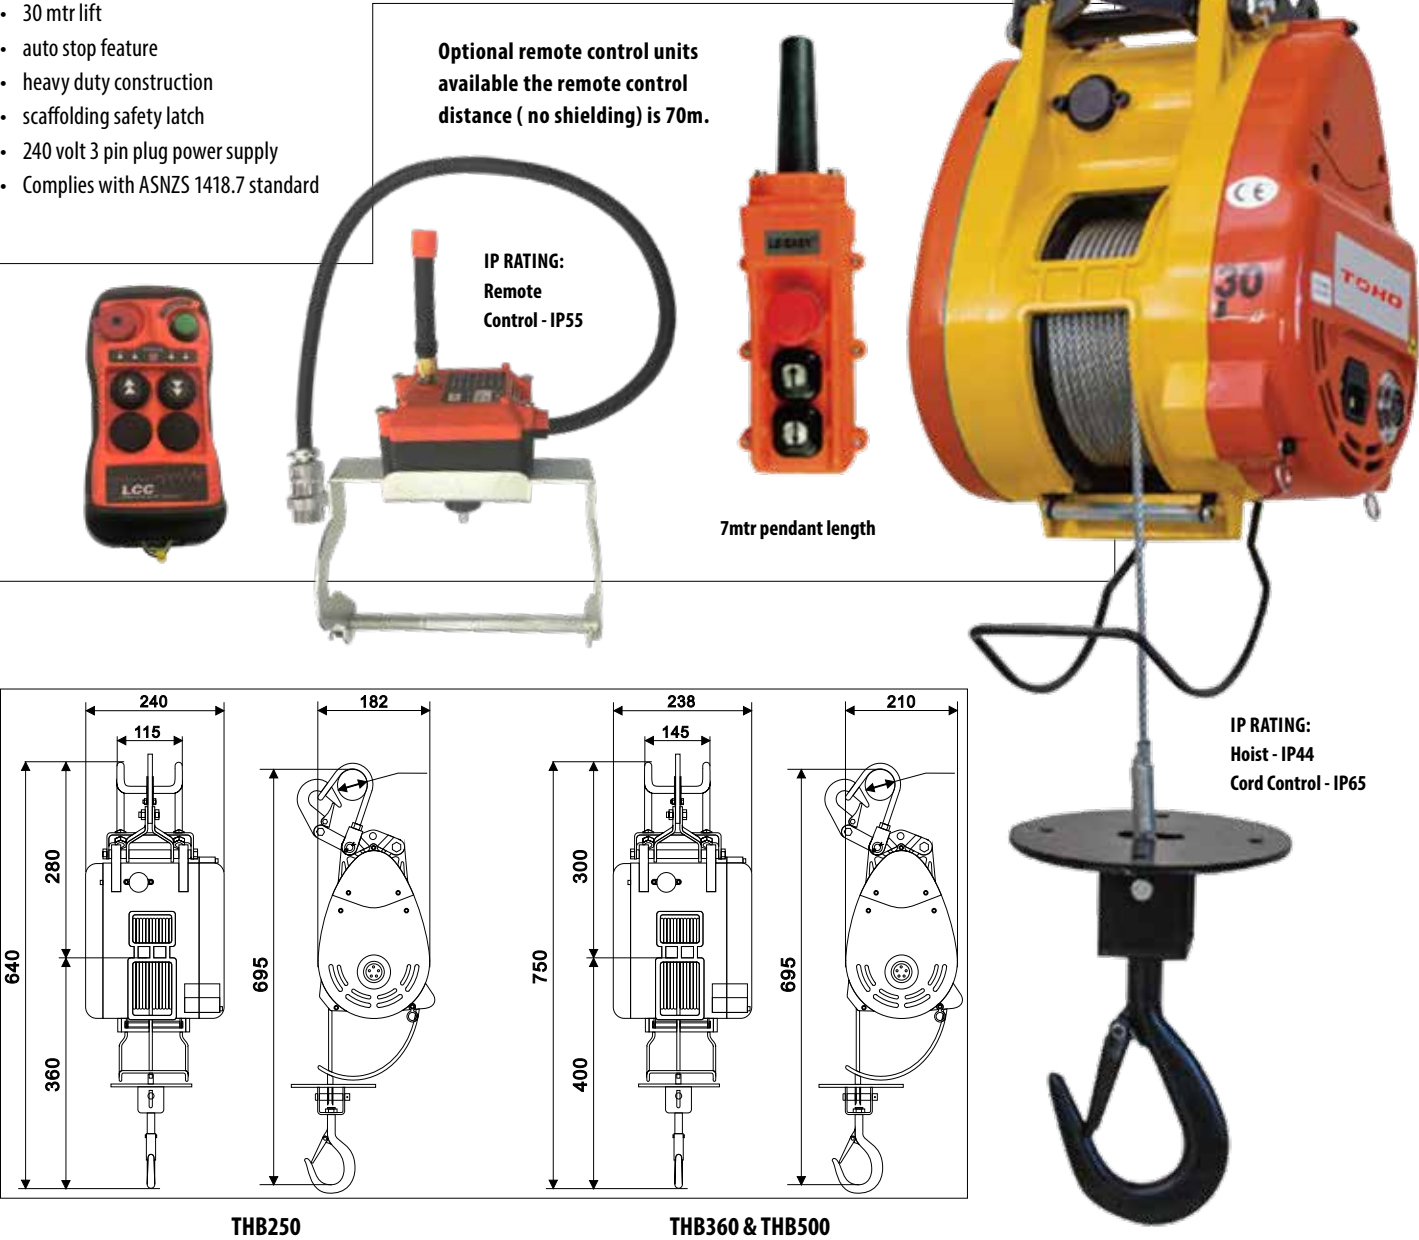

Model	Rated Capacity	Motor	Duty Cycle	Rope Dia	Lifting Speed	Power Supply	Insulation Class	Weight (Kg)	Lift (Mtr)	Optional Remote Control
TBH250	250	1500W	25%	5mm	19m/min	220-240 V	F	22	30	TBH-RP-250
TBH360	360	1600W	25%	5mm	13m/min	220-240 V	F	26	30	TBH-RP-360/500
TBH500	500	1800W	25%	6mm	13m/min	220-240 V	F	30	30	TBH-RP-360/500

TOHO Brushless Builders Hoist

Model: TBH - B260

Model: TBH - B490

A brushless builders hoist has the added advantages of increased efficiencies. There is no use of carbon brush so the friction loss between the carbon brush and the commutator is eliminated, making the energy conversion more efficient.

- Duty Cycle increases to 50% (Compared to standard models which run at 25%)
- Noise Reduction - The brushless motor also runs more smoothly because there is no mechanical contact between the carbon brush and the commutator, so the generation of noise and vibration is reduced
- 240V Motor for high efficiency and performance (260kg 2100W and 490kg 2800W)
- 50% Duty cycle for sustained heavy duty use
- Lifting height 30M
- Variable speed control with a lift speed range of 5 to 16m/min
- 7m Pendant controller with emergency stop for enhanced safety
- Robust construction for long lasting durability
- Dual brake system with automatic safety brake in case of power loss
- Optional cordless remote available
- Tested and certified to AS 1418.2 safety standards



Brushless Builders Hoist		
Model	TBH-B260	TBH-B490
Rated Capacity	260kg	490kg
Motor	2100w	2800w
Duty Cycle	0.5	0.5
Rope Dia	5mm	6mm
Lifting Speed	7-19m/min	5-18m/min
Power Supply	220-240 v	220-240 v
Insulation Class	F	F
Weight (KG)	22	26
Lift (Mtr)	30	30
Remote Control	Yes	Yes

TOHO Builder’s Hoist Mounting Arm Bracket

Model: TBHFRAME-POLE

Model: TBHFRAME-WALL

Specifically designed to hang from scaffold tubing to lift materials to and from different levels on a building site.

Available in 250kg, 360kg & 500kg models.


Top hook assembly is suitable size to fit standard 48.3mm dia. scaffolding pipe.

- Long Lasting Powder Coated Finish
- Portable / Light Weight
- Solid Mounting Bracket
- Quick Mount

DESCRIPTION

- TOHO Builders Hoist Frame Pole Mount 400kg Capacity
- TOHO Builders Hoist Frame Wall Mount 400kg Capacity

Specifications	Pipe Mounted	Wall Mounted
Width (W)	1020 mm	1020 mm
Height (H)	450 mm	450 mm
Mounting Pipe (D)	50 mm	
Capacity	500 kg	500 kg
Net Weight	13 kg	16.5 kg

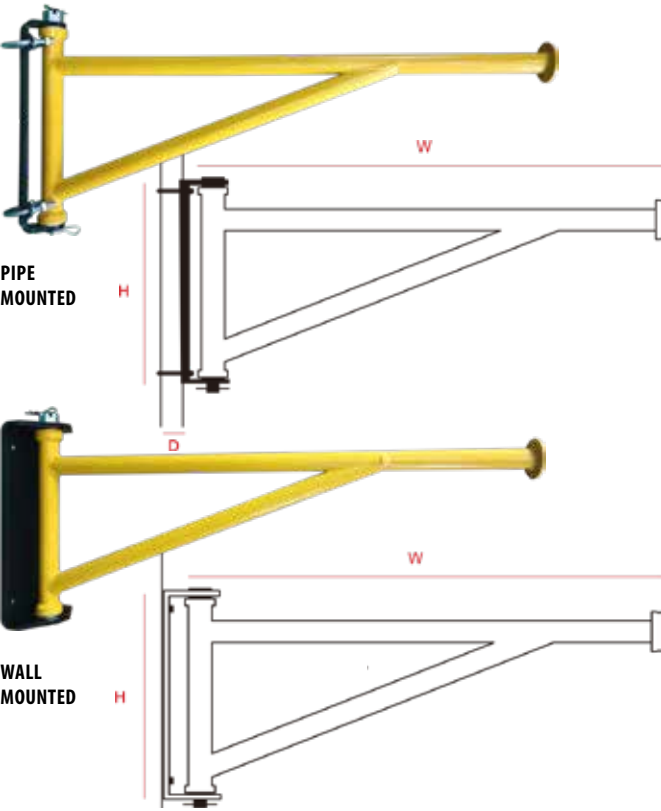

GARRICK Round Webbing Slings

- Round Slings manufactured to A.S. 4497.1 - 1997 - Safety Factor 7:1
- WLL (Working Load Limit) is clearly marked on each sling
- Each sling is colour coded to WLL for safety (each stripe is equal to 1 ton capacity)
- Test Certificate supplied with every sling



ROUND SLINGS											
WILL 1,000KG		WILL 3,000KG		WILL 5,000KG		WILL 8,000KG		WILL 2,000KG		WILL 4,000KG	
LENGTH	MODEL	LENGTH	MODEL	LENGTH	MODEL	LENGTH	MODEL	LENGTH	MODEL	LENGTH	MODEL
0.5m	GRS1T0.5M	1m	GRS3T1M	1m	GRS5T1M	1m	GRS8T1M	0.5m	GRS2T0.5M	1m	GRS4T1M
1m	GRS1T1M	1.5m	GRS3T1.5M	1.5m	GRS5T1.5M	2m	GRS8T2M	1m	GRS2T1M	2m	GRS4T2M
1.5m	GRS1T1.5M	2m	GRS3T2M	2m	GRS5T2M	3m	GRS8T3M	1.5m	GRS2T1.5M	2.5m	GRS4T2.5M
2m	GRS1T2M	2.5m	GRS3T2.5M	2.5m	GRS5T2.5M	4m	GRS8T4M	2m	GRS2T2M	3m	GRS4T3M
2.5m	GRS1T2.5M	3m	GRS3T3M	3m	GRS5T3M	5m	GRS8T5M	2.5m	GRS2T2.5M	4m	GRS4T4M
3m	GRS1T3M	4m	GRS3T4M	3.5m	GRS5T3.5M	6m	GRS8T6M	3m	GRS2T3M	5m	GRS4T5M
4m	GRS1T4M	5m	GRS3T5M	4m	GRS5T4M			4m	GRS2T4M	6m	GRS4T6M
5m	GRS1T5M	6m	GRS3T6M	5m	GRS5T5M			5m	GRS2T5M		
6m	GRS1T6M			6m	GRS5T6M			6m	GRS2T6M		
WILL 6,000KG		WILL 10,000KG									
LENGTH	MODEL	LENGTH	MODEL								
1m	GRS6T1M	1m	GRS10T1M								
2m	GRS6T2M	2m	GRS10T2M								
3m	GRS6T3M	3m	GRS10T3M								
4m	GRS6T4M	4m	GRS10T4M								
5m	GRS6T5M	5m	GRS10T5M								
6m	GRS6T6M	6m	GRS10T6M								
		8m	GRS10T8M								
		10m	GRS10T10M								

GARRICK Flat Webbing Slings

- Flat Slings manufactured to A.S. 1353 Parts 1&2 1990 - Safety Factor 8:1
- WLL (Working Load Limit) is clearly marked on each sling
- Each sling is colour coded to WLL for safety
- Test Certificate supplied with every sling



FLAT SLINGS

WILL 1,000KG	
LENGTH	MODEL
1m	GFS1T1M
2m	GFS1T2M
3m	GFS1T3M
4m	GFS1T4M
5m	GFS1T5M
6m	GFS1T6M

WILL 3,000KG	
LENGTH	MODEL
1m	GFS3T1M
2m	GFS3T2M
3m	GFS3T3M
4m	GFS3T4M
5m	GFS3T5M
6m	GFS3T6M

WILL 2,000KG	
LENGTH	MODEL
1m	GFS2T1M
2m	GFS2T2M
3m	GFS2T3M
4m	GFS2T4M
5m	GFS2T5M
6m	GFS2T6M

WILL 4,000KG	
LENGTH	MODEL
1m	GFS4T1M
2m	GFS4T2M
3m	GFS4T3M
4m	GFS4T4M
5m	GFS4T5M
6m	GFS4T6M

WILL 5,000KG	
LENGTH	MODEL
1m	GFS5T1M
2m	GFS5T2M
3m	GFS5T3M
4m	GFS5T4M
5m	GFS5T5M
6m	GFS5T6M
8m	GFS5T8M

We are constantly adding to our range of Round and Flat Sling sizes in accordance with demand. The tables show sizes at time of printing

GARRICK Heavy-duty Ratchet Tie Downs

- Model: GRTD25-0.75T** (0.75T - 25mm x 5 metre)
- Model: GRTD35-1.5T** (1.5T - 35mm x 6 metre)
- Model: GRTD50-2.5T** (2.5T - 50mm x 9 metre)
- Model: GRTD75-2.5T** (5T - 75mm x 12 metre)


- Heavy duty Ratchet Tie Down assemblies for securing loads safely with minimum effort
- Complete with straps hooks and keepers
- Comply with AS/NZS 4380.2001



GARRICK NEW Reversible Ratchet Tie Down

- Model: GRTD50-2.5T-REVERSE**
- NEW!! Ergonomic reversible action handle

- Garrick Ratchet Tie Down 50mm x 9M x 2.5T - REVERSIBLE
- Reversible Hand Ratchet and Strap 50mm x 9M LC 2500kg
- Tensioning large / heavy loads can be hard work! Garrick have introduced the NEW 50MM x 2.5T capacity x 9M Ratchet Tie Down with a LONGER, REVERSE ACTION handle – this creates an easier reverse action leverage, resulting in a smoother, safer tensioning of loads.
- Instead of ratcheting UP – you ratchet DOWN – this reverse-action enables users to use their own body weight to tension loads rather than putting stress and force on your shoulders to push upwards.
- Use a lot of 50mm Ratchet Tie Downs? Make the switch today and see for yourself how easy it is!
- 2.5T capacity x 9M length
- Reverse action gear and longer handle for extra leverage
- Hook & Keeper
- Made from weather-resistant polyester webbing
- Complies with AS/NZS 4380

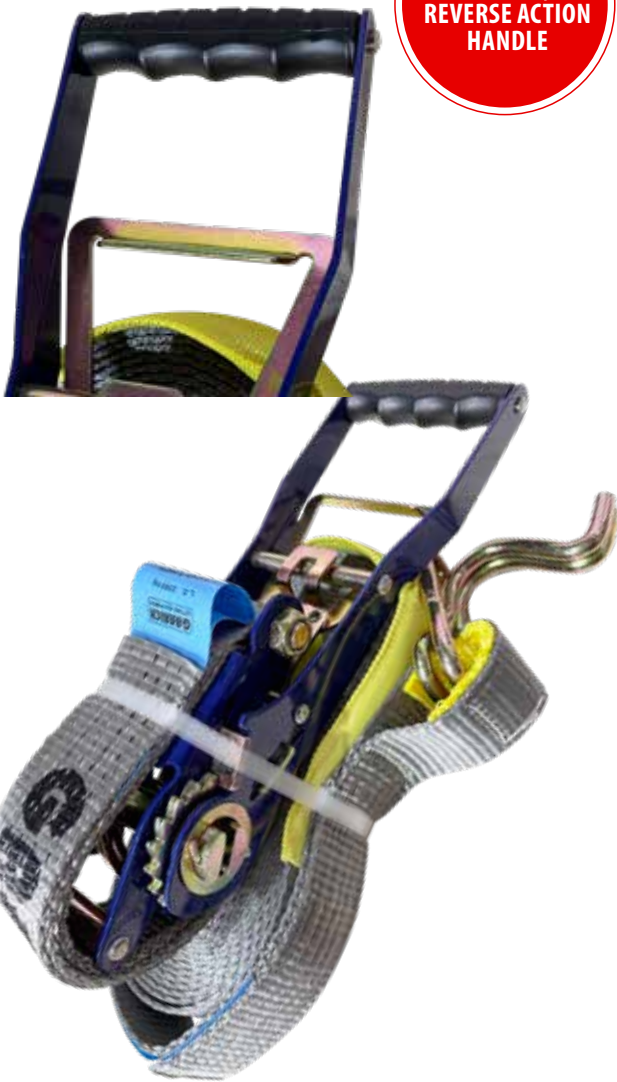

GARRICK Quick Load Ratchet Tie Downs

- Model: QGLRTD-25mm**
- Model: QGLRTD-35mm**
- Model: QGLRTD-50mm**
- NEW – Garrick QUICK LOAD Ratchet Tie Down System has revolutionised the Tie-down Industry with the PATENTED SIDE LOADING AXLE.

- No more feeding webbing to load, Simply slide webbing through the patented QUICKLOAD axle to start and secure the load easily while saving you time and effort
- Loading and unloading just became 4X FASTER
- Comply with AS/NZS 4380.2001

- AVAILABLE IN 3 SIZES:
- 25mm x 4M x 450kg capacity - 2pk
 - 35mm x 5M x 1000kg capacity - 2pk
 - 50mmx 9M x 2500kg capacity - Single pack



GARRICK Retractable Tie Down

Model: GRETRAC25MM
Model: GRETRAC50MM
NEW Garrick RETRACTABLE Ratchet Tie Downs have the added feature of retracting webbing! The webbing is stored in the barrel and retracts automatically!

- Easy to pack away and store – it simply retracts
- Added safety brake to ensure a smooth, seamless and safe retraction
- Additional length v's other retractable tie downs on the market
- No threading required
- Complies with AS/NZ 4380 Australian Standard
- 2 Sizes available

DESCRIPTION

- GARRICK RETRACTABLE Tie Down 25mm x3M x 340kg capacity S hook (comes as a 2 pack)
- GARRICK RETRACTABLE Tie Down 50mmx 6M x2260kg capacity Hook & Keeper



GARRICK Portable Evaporative 120L Air Cooler

Model: GPACST-120L

- Airflow 6800 m3/h
- Remote Control
- Float Valve Sensor
- Motor 300W
- Water Capacity: 120L
- Effective Area: 30-60m2
- 3 Speeds
- Quiet - less than 64dB
- Weight 37kg
- Castor Wheels
- 240V



ADDITIONAL SIZES AVAILABLE




EVAPORATIVE COOLING IS A COMMON FORM OF COOLING BUILDINGS. Relatively inexpensive to run as it requires a smaller amount of energy than other methods of cooling.

GARRICK Heavy Duty Cargo Nets

Garrick Heavy Duty Cargo Nets are designed and tested to meet working load limits of 1000 kg. Garrick Cargo Nets are Heavy Duty and come in 2 sizes.

- Perfectly suited to Utes and trailers.
- Avoid hefty fines and be safe with Garrick Heavy Duty Cargo nets.
- All nets have the following features:
 - Constructed with Heavy Duty mesh and vertical & horizontal struts. This design minimizes tangles and make the net extra strong and easy to use
 - Tested to a working load limit of 1000kg
 - Multiple webbing loops and eyelets for greater versatility
 - Multiple eyelet points
 - Complies with Australian Standards AS/NZS 4380:2001

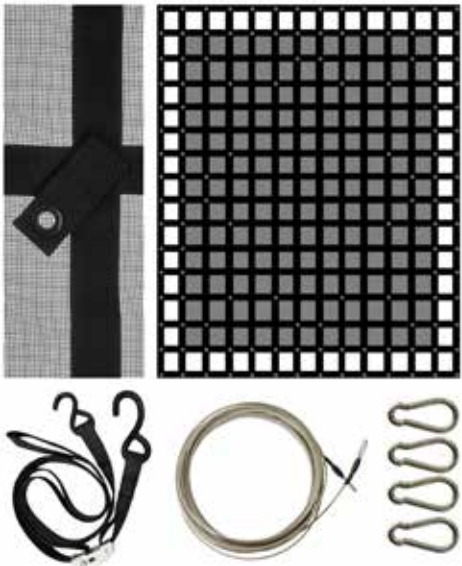


Heavy Duty Cargo Nets			
Model	Size	Size (metre)	W.L.L
GCN-HDS	Small	1.4 x 1.8	1000
GCN-HDM	Medium	2.4 x 2.4	1000



GARRICK Load Skates

Model: GLS-20T-KIT
Capacity 20 T
Suitable for moving heavy equipment over short distances

- Load Skate Kit
- 4pcs roller skates
- 2pcs turntables
- 2pcs packing plates
- 2pcs steering handles
- 2pcs link-up bar
- 1pc draw bar
- 1pc metal box with castors
- Safe and easy to use
- When used with steering handle gives precise control
- Kits come in its own storage container on wheels
- Spare components available

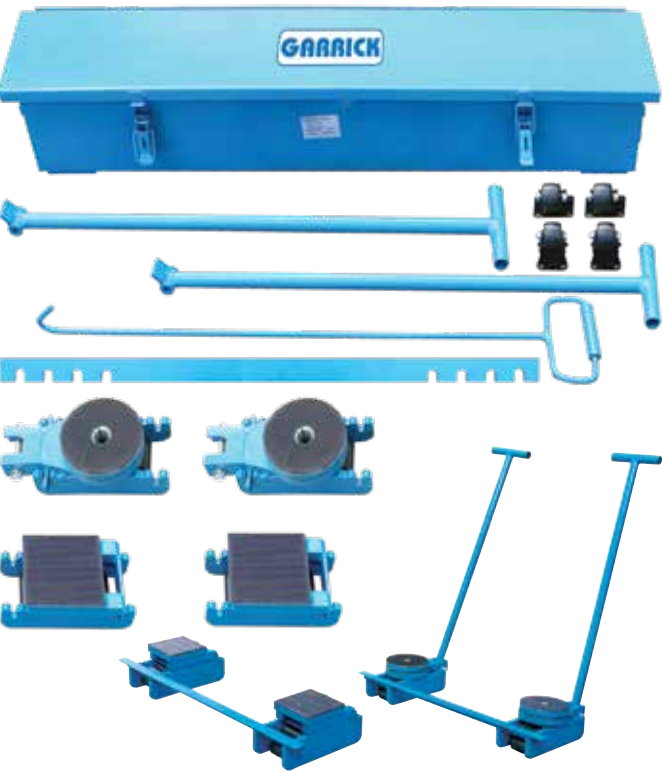

Model	Capacity (Tonne)	Length Support (mm)	Width Support (mm)	Total Height (mm)	Roller Diameter (mm)	Swivel Top (mm)	Weight of set (kg)
GLS-20T-KIT	20	120	120	108	18 dia	130 dia	50

LOAD SKATE KIT

The individual Skates are rated at 10T each, but used as a kit of 4 pieces, the total capacity is rated at 20T in the event that 2 Skates are carrying the whole load on uneven surfaces, plus the use of turntables, packing plates & bars also reduces possible effective capacity.

GARRICK Individual Load Skates

- Can be used in multiples to carry heavy loads
- Adaptable to many uses

Model	Capacity (Tonne)	Length Support (mm)	Width Support (mm)	Total Height (mm)	Net Weight (kg)	Gross Weight (kg)
GLS-10T	10	206	100	67	5.2kg	7.3kg



Accessories
Available for individual purchase to suit load skates

Model	Description
GLSK20-1	Packing Plate
GLSK20-2	Link-up Bar
GLSK20-3	Steering Handle
GLSK20-5-8-DB	Turntable and Handle Kit
GLSK20-DB	Draw Bar



TOHO Pallet Truck - 3.0T

Model: TPT-3T
Stronger, higher capacity, low maintenance unit for professional use

- Capacity: 3,000 kg (3.0T) - higher rating than most others
- Fork dimensions: 1200mm x 685mm (outside width)
- Fork size: 160 x 60 mm
- Minimum height: 80mm
- Made from 4mm alloy steel plate making the strength 6 times higher than standard mild steel
- Reinforcing rib design under support frame for higher strength
- One piece Cast Steel pump design is leak proof, minimises maintenance and extends service periods
- Fitted with grease nipples for lubrication to bearings
- Polyurethane wheels for smooth & quiet operation (Tandem Loading Wheels 80 mm dia x 70 mm, Dual Rear Steering Wheels 180 mm dia x 50mm with strong cast iron hubs)
- 3 position hand control (Raise, Neutral, Lower) plus foot release lever for lowering
- Ergonomically comfortable 30mm hand grip size with rubber wrap for comfort, strength & ease of use
- Tight 180° turning circle
- Maximum lifting height is up to 190mm above floor level



HEAVY DUTY 3T CAPACITY

With hand grip that's Ergonomically comfortable to use and steer.

Capacity KG	Fork Dimensions (Outside Width)	Fork Size mm	Minimum Height mm
3000	1200 x 685	160 x 160	80

IREGA are a specialist manufacturer of adjustable wrenches ONLY, and have machinery and technology dedicated to making products of the highest quality



IREGA Chrome Adjustable Wrenches
Model 77 - Traditional Design

Sizes from 4" to 30"

- Manufactured in Spain exceeding the highest standards including ISO 6787, DIN 3117, BS 6333, ASME B107.8M
- Perfectly parallel jaw surfaces ensure grip of nut
- Precision ground jaw slides provide smoother action and accurate adjustment of jaw and handle
- Chrome finish
- Triple coated (2 Ni + 1 Cr) for perfect chrome adherence and maximum rust resistance

Model	Size	Jaw Opening
7704	4" 100mm	13mm
7706	6" 150mm	19mm
7708	8" 200mm	24mm
7710	10" 250mm	29mm
7712	12" 300mm	34mm
7715	15" 375mm	43mm
7718	18" 450mm	53mm
7724	24" 600mm	62mm
7730	30" 760mm	78mm



IREGA Black Adjustable Wrenches
Model 77 - Traditional Design

Sizes from 4" to 24"

- Manufactured in Spain exceeding the highest standards including UNE 16-532, ISO 6787, DIN 3117, ASME B107.8M
- Perfectly parallel jaw surfaces ensure grip of nut
- Precision ground jaw slides provide smoother action and accurate adjustment of jaw and handle
- Black Phosphate finish

Model	Size	Jaw Opening
B7704	4" 100mm	13mm
B7706	6" 150mm	19mm
B7708	8" 200mm	24mm
B7710	10" 250mm	29mm
B7712	12" 300mm	34mm
B7715	15" 375mm	43mm
B7718	18" 450mm	53mm
B7724	24" 600mm	62mm



IREGA Model 92 Wrenches

Sizes from 4" to 18"

- Wider jaw opening than traditional models
- Non-protruding jaw shank
- Perfectly parallel jaw surfaces ensure correct grip on nuts
- Chrome Vanadium steel – great resistance, minimum wear, unbeatable durability
- Thinner and longer jaws for greater accessibility in tight spaces
- Triple coated chrome finish
- Metric measuring scale on jaws for presetting and sizing of nuts, bolts etc
- Ergonomic handle design makes work easier and more efficient



Model	Size	Jaw Opening
9204	4" 100mm	13mm
92W06	6" 150mm	24mm
92W08	8" 200mm	30mm
92W10	10" 250mm	34mm
92W12	12" 300mm	39mm
9215	15" 375mm	43mm
9218	18" 450mm	53mm



IREGA SWO Adjustable Wrenches,
- Super Wide Opening

Sizes: 6", 8" & 10"



- Compact handle with large head capacity for where accessibility is a problem (e.g. Plumbing or Automotive), or where light weight is an advantage such as maintenance applications
- 6" SWO opens up to 1.3/8" (34mm), 8" SWO opens up to 1.1/2" (39mm)
- 10" SWO opens up to 2" (53mm)
- Non-protruding jaw shank
- Replaceable Rubber Grip prevents damage to adjacent surfaces in confined spaces and allows more comfortable application of greater force on its shorter handle
- Longer, thinner Jaws for greater accessibility
- Made from Chrome Vanadium steel
- Ideal for Maintenance, Plumbing, Automotive etc

Model	Size	Handle	Jaw Opening	Packaging
SW092-06C	6" 150mm	Chrome	34mm	Bulk
SW092-06C-BL	6" 150mm	Chrome	34mm	Blister
SW092-08C	8" 200mm	Chrome	39mm	Bulk
SW092-08C-BL	8" 200mm	Chrome	39mm	Blister
SW092-10C-BL	10" 250mm	Chrome	53mm	Blister
SW099-06	6" 150mm	Black	34mm	Bulk
SW099-06-BL	6" 150mm	Black	34mm	Blister
SW099-08-BL	8" 200mm	Black	39mm	Blister

Lightweight and compact adjustable wrench.
Always handy: anytime, anywhere.



Available in Bulk Counter
Top Merchandiser with



Ideal for use in
confined spaces

Blister Packaging



6 x 6" (SW099-MERCH-8)
6 x 8" (SW099-MERCH-6/8)
Wrenches





IREGA 1000V Insulated Adjustable Wrenches

Sizes from 6" to 12" – 6" and 8" are Super Wide Opening Jaw

- For work on voltage up to 1,000V AC or 1,500V DC
- Each individual insulated wrench is submitted to a high voltage test according to the EN-60900 Standard (equivalent IEC-900) That is, 10,000 Volts for 10 seconds, and only those that pass the test are accepted
- The handles are insulated with "plastisol" material made of three layers of different colours to warn of danger due to damage
- Red (Guaranteed), Orange (Caution) & Yellow (Danger)
- Available in sizes of 6" (150mm), 8" (200mm), 10" (250mm) & 12" (300mm)

Model	Size
INS-06-SWO	6" 150mm
INS-08-SWO	8" 200mm
INS-10	10" 250mm
INS-12	12" 300mm
INS-15	15" 350mm

IMPORTANT:

Insulated adjustable wrenches cannot be homologated to VDE standards because the part used for adjustment (the knurl) cannot be insulated. Consequently, complete user's security cannot be guaranteed.

SW092-XS-MERCH-6/8 - Merchandiser Includes:
6 x SW092-06-XS + 6 x SW092-08-XS

Scan for video

IREGA Xtra Slim Jaw Adjustable Wrenches

Sizes: 100mm (4"), 150 mm (6") and 200 mm (8")

- Compact handle with large head with the added benefit of greater accessibility due to the design of the Xtra Slim jaw which is 50% thinner than standard wrenches with a similar opening
- Based on the design of the standard SWO (Super Wide Opening) range, but with much thinner jaws.
- Can fit into spaces and on thin lock nuts that other wrenches can't reach
- Incorporates all the other features of the standard SWO range

Model	Size	Opening	Jaw Opening	Weight
92-XS-04	4" 100mm	Standard	13mm	50g
92-XS-06	6" 150mm	Standard	24mm	126g
SW092-06-XS	6" 150mm	Super Wide	35mm	200g
SW092-08-XS	8" 200mm	Super Wide	39mm	335g



IREGA Reversible Jaw Wrenches

Sizes from 6" to 12" – 6" and 8" are Super Wide Opening Jaw

- Wider jaw opening than traditional models
- 4 Sizes: 6", 8" 10" 12"
- A Reversible jaw with Xtra Capacity allows for working with bigger diameter nuts and pipes with the same adjustable wrench



Scan for video

Model	Size	Jaw Opening
92WR06	6" 150mm	27mm
92WR08	8" 200mm	34mm
92WR10	10" 250mm	40mm
92WR12	12" 300mm	45mm



GARRICK Aluminium Pipe Wrenches

Sizes from 14" to 48" – Straight / Offset

High strength construction with large capacity jaws and induction hardened teeth to retain sharp edge

- Straight Aluminium Pipe Wrench
High strength construction with large capacity jaws and induction hardened teeth to retain sharp edge
- Offset Aluminium Pipe Wrench,
Exceptionally strong, yet ultra light & ideal for use in confined space such as when pipe is against a wall

Model	Pipe Wrench Size	Maximum Pipe Size
PWA-10	10"	1 1/2"
PWA-12	12"	2"
PWA-14	14"	2"
PWA-18	18"	2 1/2"
PWA-24	24"	3"
PWA-36	36"	5"
PWA-48	48"	6"



Model	Offset	Pipe Wrench Size	Maximum Pipe Size
PWA-OS-14	90°	14"	2"
PWA-OS-18	90°	18"	2 1/2"

GARRICK Chain & Strap Wrenches

Model: SW8 (1"– 8")

STRAP WRENCH

High strength aluminium alloy construction with nylon strap for positive grip without marking surfaces.

Chain Wrenches

REVERSIBLE CHAIN WRENCH

High strength positive grip for tightening and loosening without removal of chain.

Heavy-duty Chain Wrench

Designed for the most demanding jobs.
Double-sided head and quick-release action.



Size	Reversible Chain Wrench	Heavy Duty Tongue Chain Wrench	Wrench Length (mm)
2-1/2"	-	CW-2.5	700
4"	CWR-4	CW-4	900
6"	-	CW-6	1000

GARRICK Steel Pipe Cutters

Model: 6042-1 (1.1/4")

Model: 6050-1 (2")

- Precision drop forged
- steel construction for
- easy burr-free cutting
- Spring system by washers for a better cut & longer Cutter Wheel life
- Instant cutter wheel change system (no tool required)



GARRICK Heavy-duty Steel Pipe Cutter

Model: 6054-1 (4" / 114mm)

Precision die cast steel body for easy burr-free cutting

- Spring system by washers for a better cut & longer cutter wheel life
- Instant cutter wheel change system (no tool required)
- Includes a Tommy Bar extension handle on the end of cutter for extra leverage when cutting larger diameter pipes



GARRICK Tube Cutters

Model: 6430-1

Mini Tube Cutters 3 - 30mm

Fully adjustable precision tube cutting in limited space.

- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required)
- Ergonomic knob
- Spare cutter wheel in knob
- On backing card for merchandising



GARRICK Standard No.30 Tube Cutter 3-30mm

Model: 7330-1

Standard economical style of Tube Cutter

- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required)
- Ergonomic knob
- On backing card for merchandising



GARRICK Telescopic Tube Cutters

Model: 7435-1 (3 - 35mm)

Model: 7445-1 (3 - 45mm)

Model: 7476-1 (6 - 76mm) **

- Magnesium alloy body for light weight
- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required) - 4 rollers for a better location of the tube
- Completely removable professional reamer
- Spare cutter wheel on the cap of the knob
- On backing card for merchandising
- ** Includes Quick-Release Adjustment System knob



GARRICK Multi Tube Bender

Model: TB-MB

Compact precision bender for tube bending to 180°

- 3 sizes in one tool: 1/4", 5/16", 3/8" O.D



GARRICK Universal Tube Bender

Model: TB-10 (3/8")

- Individual precision benders for tube bending to 180°




GARRICK Professional Tube Benders

Model: TB-12 (1/2")

Model: TB-20 (3/4")

- Easier and more accurate to use
- Offset handles and grips for ultimate comfort
- Angle markings for reference to 180°
- "not suitable for hard drawn copper tube"

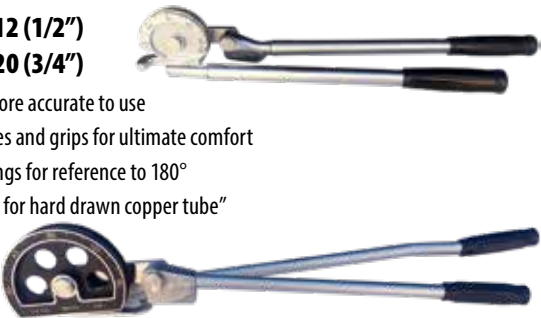

GARRICK Tube Bending Spring Set

Model: TB-SPRING – Set of 5

- One flared end for easy installation and removal
- Will not collapse tube walls during bending
- Made of heavy duty steel spring with nickel finish
- Packaged in durable vinyl sleeve
- 1/4", 5/16", 3/8", 1/2", & 5/8"



GARRICK Basin Wrench 32mm

Model: 6200-1

Compact precision bender for tube bending to 180°

- Made from drop forged steel
- Hook can be positioned to the right or left



GARRICK Universal Flaring Tool

Model: FT-U

- Unique economic self-adjusting 45° flaring tool
- Compact & easy to use, with innovative infinitely adjustable tube holding mechanism
- 3/16" - 5/8" O.D



GARRICK Heavy Duty Eccentric Flaring Tool Kit (1/4" - 3/4" O.D.)

Model: FT-HDE

- 45° flares on standard copper or tougher materials such as mild steel, stainless steel & R410 gas compliant copper
- Eccentric cone enables easier operation
- 1/4" - 3/4" O.D.



GARRICK Double Flaring Tool Kit

Model: FT-DFS

- 45° single or double flares
- Includes flaring tool, 7x double flare attachments & Tube Cutter
- 3/16" - 5/8" O.D.



GARRICK Expander Kit

Model: TE-M

- Single-stage expanders designed to expand tubing for fast, accurate joints in soft copper, aluminium and soft steel tube without using fittings.
- The mechanism is free-floating and self-centring
- Sizes: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8"



Also Available: Model TE-LHT GARRICK - Lever Handle Tool only for TE-M Tube Expander

GARRICK Plastic Pipe Shears

Model: 5026-1 and 5035-1

- Easily cuts plastic pipe and tubing such as PVC and CPVC, as well as PEX, polyethylene, polybutylene and rubber hose.
- Easy, straight & precise cut - minimal effort required
- Lightweight strong Magnesium Alloy diecast body
- Instant cutter wheel change system (no tool required)
- Stainless Steel blade made in Solingen, Germany with special edge geometry and PTFE (Teflon) coating - will not stick to material
- Automatic blade release
- Cam action cutting produces a cleaner more precise cut.
- Rolling edges have elliptical support to minimise deformation of pipe through the cut
- On backing card for merchandising



Model	Description	Capacity
5026-1	Plastic Pipe Shear	26mm
5035-1	Plastic Pipe Shear with 'V' shaped blade	35mm

GARRICK Ratcheting Plastic Pipe Shears

Model: 5042-1

Easily cuts plastic pipe and tubing such as PVC and CPVC, as well as PEX, polyethylene, polybutylene and rubber hose

- Stainless Steel blade made in Solingen, Germany with special edge geometry and PTFE (Teflon) coating - will not stick to material
- One handed operation ratcheting action cut
- When left open, blade is not exposed.
- Easy, straight & precise cut - minimal effort required
- Lightweight but strong Magnesium Alloy diecast body
- 'V' shaped blade to pierce tube allowing the cut to start easier




Model	Description	Capacity	Rubber Comfort Grip	One Handed Blade Release
5042-1	Plastic Pipe Shear with 'V' shaped blade	42mm		✓
5050-1	Plastic Pipe Shear with 'V' shaped blade	52mm	✓	✓
5063-1	Plastic Pipe Shear with 'V' shaped blade	63mm	✓	✓

GARRICK Plastic Hose/Conduit Cutters

Model: 5028-1 and 5022-1

Cuts plastic and pneumatic hoses and PEX tube

- Lightweight strong magnesium Alloy diecast body
- Teflon coated blade - will not stick to material
- Easy, straight precise cut
- Single action
- Automatic blade release
- One handed locking system
- On backing card for merchandising

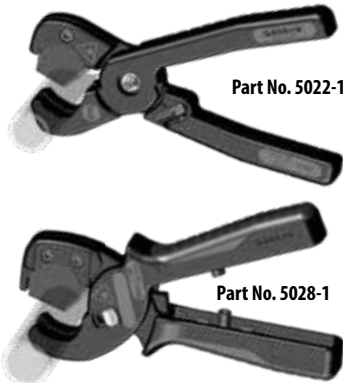

Model	Description	Capacity
5022-1	Plastic hose/ conduit cutter	22mm
5028-1	Plastic hose/ conduit cutter	28mm

GARRICK Internal/External Deburrer

Model: 6100-1

(3-42mm capacity)

- ABS Body
- Blades made in Solingen, Germany
- Positive, comfortable grip
- On backing card for merchandising



GARRICK Manual Pressure Test Pump

Model: TPRP50

Durable, precision unit for accurately testing all tube/pipe systems & pressure vessels. Working parts rust-proofed, 12L tank is galvanised, epoxy coated.

- Large capacity pressure testing pump
- Double check valves with stainless steel ball seats
- Accurate readings up to 50 bar / 700 psi
- 12 litre tank capacity
- Suitable for clean water or oil as a test liquid





ASADA Electric Pressure Test Pump

Model: EP440
Ideal for leak testing of pipes, tanks, valves & joints

- Hydrostatic pressure
- Self-priming
- Over-load protection
- Max. pressure 40Kgf/cm2(568.9psi)
- Discharge water volume: 3.0L/min(50Hz) - 3.7L/min(60Hz)
- Includes: high pressure hose 1m, suction hose 2.6m, filter, relief hose 3m, wrench 2pcs, carry case
- Light weight – Only 9 Kg



GARRICK Brazing & Soldering Torch Pump

- Model: TORCH-MAPP
- Faster and more efficient operation with swirl flame providing maximum heat.
 - Ideal for soft soldering up to 4" and brazing up to 1.1/4" copper and steel tube
 - Instant on/off provides easier ignition and increased fuel savings
 - Adjustable Flame for better control in a variety of applications.
 - Pressure-regulated, which allows the torch to burn in any direction with consistent performance
 - Lockable trigger for continuous operation
 - Fits all leading disposable gas cylinders
 - Replaceable Swirl Flame Tip
 - Suits Mapp or Propane Gas
 - Cast Aluminium Body



GARRICK Air/Acetylene Torch Kit

Model: TORCH-ACETYLENE
GARRICK Gas Torch uses Acetylene & Air

- No oxygen cylinder required - makes it easier to carry & use on site and cheaper operation
- Suitable for soft soldering and brazing of copper, brass, bronze and aluminium
- Burns hotter than MAPP torches making it suitable for larger work
- Includes brass construction regulator, contents gauge & flashback arrestor
- Gas hose is 3.7m long to allow manoeuvrability
- Comfortable handle includes Quick Connect fitting for easy changing of tips and safe storage
- Flame swirl tip design reduces brazing time
- Stainless steel & brass tip rotates 360 deg



GARRICK Natural Zeolite Absorbent

Model: FXZE0-15 - 22 Litre (15kg) bags
A natural absorbent for use with oil, petroleum and chemical spills of liquid and vapour

Zeolite is a rock type absorbent for use with oil, petroleum and chemical spills of liquid and vapour. It is a natural product formed due to intense volcanic activity about 250,000 years ago. Due to its large internal surface area, it is faster acting & absorbs larger quantities than most other "kitty litter" types of absorbent. It's high Cation Exchange Capacity allows vapour and odour absorbency. Being a light weight clay, it is easy to handle, but not too light that it can't be used in windy or draughty outdoor conditions.

- Universal Absorbent
- Fast Acting
- 100% Natural
- Workplace & Ecology Safe
- Absorbs liquids, vapours and odours
- Carefully screened particle size for maximum surface area contact with spill
- 22 Litre bag weighs 15 kg to comply with OH&S safe lifting requirements




SPILLFIX Universal Organic Absorbent

Model: FX15L AND FX50L
An eco-friendly, fast acting, high absorbency coir product for safe and efficient cleanup of liquid spills. Spillfix can absorb up to 5 times its own weight in liquids. Works faster than other absorbents - absorbs 90% capacity in under 10 mins.

- Coir is a natural and renewable resource that is free of any chemicals and toxins, produced as a by-product when coconut husks are processed, it is washed, heat treated, screened and graded to a unique absorbent specification before being packed
- Consistent and uniform in texture and is a completely homogenous material composed of millions of capillary micro-sponges. It demonstrates a preference for hydrocarbons (e.g. oil) over water and will remove hydrocarbons from an oil / water emulsion making it suitable for emergency road response application
- Highly stable absorbent, suitable for use of hazardous spill applications including acids & caustics. The nature of the media does not cause any reaction with unstable liquid chemicals. It has been tested to the USEPA Leachate standards for landfill disposal (always check with local authorities). It is biologically stable and free of harmful micro-organisms. When absorbed media is disposed of, it provides a perfect environment for the development of bio-degrading organisms that can oxidise waste.

Model	Size	Weight per Bag	Qty per Pallet
FX15L	15 Litre Bag	3 kg	122
FX50L	50 Litre Bag	9 kg	72

ABSORBENCY COMPARISONS		
Absorbent	by Mass	by Volume
Spillfix (coir)	295%	67%
Diatomite (clay) ("Kitty Litter" type)	40%	27%

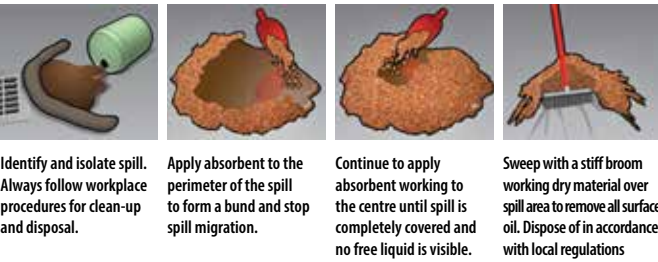

GARRICK Absorbent Roll 40cm x 50m

Model: FXROLL
General purpose poly absorbent roll also known as universal or all-liquid absorbents are colour-coded grey for quick identification. They are highly effective at absorbing everyday spill clean ups in schools, laundries, health care facilities or industrial workplaces, any areas where liquids may be spilled.

- You will see the efficacy of absorbing spills such as coolant, solvents, degreaser, paint, blood, mild chemicals and hydrocarbons (oil, fuel, diesel and petrol)
- High absorbency ratio for spills, leaks and drips
- Durable , non-allergenic and non-hazardous



GARRICK Absorbent Pillow Box of 12

Model: FXPIL
General purpose poly absorbent pillow also known as universal or all-liquid absorbents are colour-coded grey for quick identification. They are highly effective at absorbing everyday spill clean ups in schools, laundries, health care facilities or industrial workplaces, any areas where liquids may be spilled.

- You will see the efficacy of absorbing spills such as coolant, solvents, degreaser, paint, blood, mild chemicals and hydrocarbons (oil, fuel, diesel and petrol.)
- High absorbency ratio for spills, leaks and drips.
- Durable , non-allergenic and non-hazardous



GARRICK Absorbent Pad 40x50cm

Model: FXPAD-N
General purpose absorbent pads are highly effective at absorbing spills such as coolant, solvents, degreaser, paint, blood, mild chemicals and hydrocarbons (oil, fuel, diesel and petrol.) Highly effective at absorbing everyday spill clean ups in schools, laundries, health care facilities or industrial workplaces, any areas where liquids may be spilled. General Purpose Absorbent Pads Features:

- Ideal for use in industrial workplaces: factories, mine sites, maintenance workshops, warehouses, panel beaters, paint shops, fuel handling and oil storage depots, vehicle repair shops or transport facilities.
- High absorbency ratio for spills, leaks and drips
- Durable, non-allergenic and non-hazardous
- Absorbent Pad
- 100 Pads per ctn




GARRICK Organic Absorbent Booms

Model: FXB1.5
Model: FXB3
1.5m & 3m Booms provide excellent absorption, and surface contact to contain a spill prior to application of the loose absorbent material.

Garrick Booms have strong wicking action – the nature of the product provides a strong “wicking” action away from the surface meaning the spill is directed throughout the boom.

- The design of the organic boom provides increased surface contact to trap migrating liquids, maximise the absorbent action, and prevent leakage under the boom.

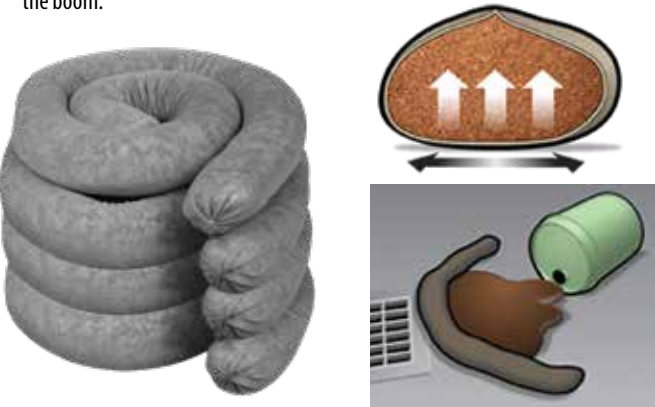

Model	Size (length)	Absorption Capacity	Qty per Carton
FXB1.5	1.5 m	7.5 Litres of oil	12
FXB3	3 m	15 Litres of oil	6

GARRICK Workshop/Yard Universal Spill Kits

Larger kits in “wheelie bin” storage so that they can be taken quickly and easily to the spill

- Kits contain bags of Universal Organic Absorbent, Booms, Pads, Waste Bags & Ties, Dustpan & Broom, Gloves, Instruction Card, MSDS & Contents Re-order Sheet
- Refill components readily available



Because the absorbent material is inert, the kits can be used on all spills - no need for product specific kits

Model	Description	Used For
FXSKMED	Medium kit in a 120 litre Wheelie Bin	Small manufacturing facilities, laboratories, workshops, liquid storage areas and service stations.
FXSKLGE	Larger kit in a 240 litre Wheelie Bin	Warehouses, production plants, workshops, truck stops and loading bays etc

SPILLFIX Spill Kit Refill - Medium

Model: FXSKREFILL-MED
SpillFix refill kits are a must-have for keeping your workplace prepared and compliant. When your original spill kit runs low, top it up with this convenient refill pack—complete with:

- Adsorbent - 1 x 50 Litre
- Pads and Booms
- Contaminated waste bags
- Cable ties
- Gloves
- Dustpan



SPILLFIX Spill Kit Refill - Large

Model: FXSKREFILL-LGE
SpillFix refill kits are a must-have for keeping your workplace prepared and compliant. When your original spill kit runs low, top it up with this convenient refill pack—complete with:

- Adsorbent Bags
1 x 15 Litre + 2 x 50 Litre
- Contaminated waste bags + ties
- Pads and Booms
- Gloves
- Dustpan



GARRICK Compact Spill Kit for Utes

Model: FXSKUTE
Kit contains Universal Organic Absorbent, Boom, Absorbent Pad, Waste Bag & Tie, Gloves, Instruction Card & Material Safety Data Sheet



GARRICK Transport or Workshop Universal Spill Kit

Model: FXSKBAG
Economical Kit that can be stowed in vehicle cabin or conveniently hung in smaller workshops

- Kit contains Universal Organic Absorbent, Boom, Pads, Waste Bag & Tie, Dustpan & Broom, Gloves, Instruction Card & Material Safety Data Sheet
- Compact Kit that even includes tools for disposal after fixing spill.
- Refill components readily available.



As we assemble all Spill Kits in our warehouse, we can vary the contents to suit any custom requirement

GARRICK Bio-Waste Absorbent

Model: FXBW500ML
Model: FXBW5
Model: FXSKBW
Spillfix Bio-Waste is a natural, non-toxic absorbent powder that rapidly immobilises potentially infectious spills such as blood, vomit, urine & faeces that come from humans and animals.

- The spill is rapidly solidified to allow for easy sweep up and safe disposal, minimising risk of personal contact and contamination
- Available in 500ml sachets, 5 litre re-sealable plastic containers, or as a spill kit

Bio-Waste Absorbent is also great for getting spilt red wine out of carpets!



Model	Description
FXBW500ML	500ml Sachets
FXBW5L	5 litre Resealable plastic containers
FXSKBW	Kit containing 500ml Bio-Waste Absorbent, Gloves, Apron, Mask c/w Eyeshield, Scoops, Clinical Waste Bags, Hygienic Alcohol Wipes, Instructions and Material Safety Data Sheet.

GARRICK Cleaning Cloths

Model: GWR5 - 5KG (WHITE COTTON)
Model: GMR10 - 10KG (MIXED COLOURS)
Model: GMR20 - 20KG (MIXED COLOURS)
Garrick Cleaning Cloths are made from 100% cotton pieces that are cut to a convenient size, available in 5KG, 10KG and 20KG.

- FEATURES:
- High absorbency
 - 100% Cotton
 - Screened for metal objects



GARRICK Soluble Cutting Oil

Model: SOL5 (5 L)
Model: SOL20 (20 L)
A milky white, mineral based, general purpose water miscible cutting fluid.

Recommended Dilutions:

General Purpose Machining	1 : 20
Milling, Drilling & Tapping	1 : 10
Machining Cast Iron & Grinding	1 : 25

It is essential to add a calculated volume of oil to a known volume of water and mix well. (Adding water to oil may result in separation). At recommended dilutions, the product is classified as non-hazardous.



ASADA Neat Threading Oil

Model: SP-OIL-5 (Standard - 5 L)
Model: SP-OIL-20 (Standard - 20 L)
Model: SP-OIL-205LDRUM (205L DRUM)
Model: SP-OIL-5HT (High Grade - 5 L)
Model: SP-OIL-20HT (High Grade - 20 L)

- The same cutting oil used in threading machines is ideal for general use such as drilling, tapping etc.
- High grade also available for stainless and high tensile steels.



INDEX TO PRODUCTS

A

Abrasive (Linishing) Belts	24
Absorbents	58, 59, 60
Air Cooler	47
Air/Acetylene Torch Kit	57

B

Bandsaw	13, 15
Bench Grinders	19, 20, 21
Benders	7, 8, 9, 10
Brazing & Soldering Torch Pump	57
Buff & Polishing	21, 22
Buffing Mops	25

C

Chain Blocks and Hoists	34, 35
Chain Slings & Sets	35, 36
Chain Vices	33
Cleaning Cloths	61
Cargo Nets	48
Cutters	54, 55

D

Digital Crane Scale	39
Drill Presses	16, 17
Drill Sharpener	18
Drill Vice	18
Drum Clamp & Lifter	38

E

Electric Hoist	39
Expander Kit	55

F

Flaring Tools	55
Footswitch	31

G

Girder Trolley & Clamps	37
Grinding Attachment	21
Grinding Wheel Dresser	25
Grinding Wheels	25

H

Hoists	39, 40, 41, 42, 43
--------	--------------------

I

Internal/External Deburrer	56
----------------------------	----

L

Linishers	22
Load Skates	49

M

Mitre Table	21
-------------	----

N

Nipple Chuck Set	30
------------------	----

O

Oils	62
------	----

P

Pallet Truck	50
Permanent Magnet Lifter	37
Pipe Saw	16, 31
Pipe Stand	33
Pipe Threaders	30
Plastic Hose/Conduit Cutters	56
Plastic Pipe Shears	56

P

Polishing Belt	23
Portable Work Stand	33
Pressure Test Pump	31, 56, 57

R

Roller Stands & Tables	15
Roll Groover	32, 33
Rubber Contact Wheels	23

S

Sanding Discs Self Adhesive	24
Shackles & Chain Hook	36
Shears	11
Sheetmetal Folder & Rolls	11
Sheetmetal Hole Punches	12
Sheetmetal Swage, Jenny & Wiring Machines	12
Slings	44, 45
Spare Dies & Dieheads	27, 28

T

Threading Machines	26, 27
Tie Downs	45, 46, 47
Tapered Spindles	25
Tube Bender	55
Twister Attachment	8

U

Ute Crane	38
-----------	----

W

Wire Wheel	25
Wrenches	51, 53, 54, 55





460 - 462 The Boulevard, Kirrawee, NSW 2232
P.O. Box 3118, Kirrawee, NSW 2232

PHONE: (02) 9545 6633

EMAIL: sales@garrickherbert.com.au WEBSITE: garrickherbert.com.au